

Boral Recycling Widemere Annual Review

25 November 2019 - 24 November 2020

Lot 4001 DP 1173524 Widemere Road Wetherill Park

Development Consent SSD 6525





Ref	Prepared by	Approved by	Date	Amendments	Distribution
V1.0	Peter Scioscia Environment Business Partner NSW/ACT	Shoanne Labowitch Environment Manager NSW/ACT	20 January 2021		Initial draft for internal distribution for review
V1.1	Peter Scioscia Environment Business Partner NSW/ACT	Shoanne Labowitch Environment Manager NSW/ACT	9 March 2021		Department of Planning, Industry and Environment
V2	Shoanne Labowitch Environment Manager NSW/ACT			Amended to address Department comments dated 16/07/2021	Department of Planning, Industry and Environmental Protection Agency Fairfield City Council Online at <u>https://www.bor</u> <u>al.com.au/locati</u> <u>ons/ boral- recycling-</u> <u>widemere-</u> <u>wetherill-park</u>



Name of operation	Boral Recycling Widemere			
Name of operator	Boral Resources (NSW) Pty Ltd			
Development consent	SSD 6525			
Name of holder of development	Boral Resources (NSW) Pty Ltd			
consent				
Annual Review start date	25 November 2019			
Annual Review end date	24 November 2020			
I, Philip Paterson certify that this audit is a true and accurate record of the compliance statues of the Boral Recycling Widemere Project for the period of the 2020 Reporting Period and that I am authorised to make this statement on behalf of Boral Resources (NSW) Pty Ltd. Note The annual review is an 'environmental audit' for the purposes of section 122B(2) of the Environmental Planning and Assessment Act 1979. Section 122E provides that a person must not include false or misleading information (or provide information for inclusion in) an audit report produced to the Minister in connection with an environmental audit if the person knows that the information is false or misleading in a material respect. The maximum penalty is, in the case of a corporation, \$1 million and for an individual \$250,000.				
Name of authorised reporting officer	Philip Paterson			
Title of authorised reporting officer	Site Manager			
Signature	fat			
Date	16/07/2021			



Table of Contents

Contents

1.	Introduction	7
В	ackground	7
Ρ	urpose/Scope	7
2.	Statement of Compliance	9
3.	Development overview	11
3	.1 Widemere Recycling Operations	11
3	.2 List of Relevant Approvals	15
3	.3 Operations over reporting period	15
3	.4 Proposed operations for next reporting period	17
4.	Environmental monitoring results and complaints records	18
4	.1 Relevant statutory requirements and performance criteria	18
	4.1.1 Waste Monitoring	18
	4.1.2 Dust Management	21
	4.1.3 Storm Water Management	23
	4.1.4 Noise Management	24
	4.1.5 Visual Controls	26
	4.1.6 Traffic Management	26
	4.1.7 Site Security	27
	4.1.8 Refuelling	27
	4.1.9 Waste Disposal and Sewage Management	27
4	.2 Monitoring requirements	27
	4.2.1 Dust Management	27
	4.2.2 Noise Monitoring	33
	4.2.3 Surface Water Quality	36
	4.2.4 Waste Monitoring	36
	4.2.5 Complaints Register	39
	4.2.6 Procedure for the Receival and Screening of Waste for Recycling	40
	4.2.7 Storm Water Management Plan	41
	4.2.8 Landscape Management Plan	41
5.	Compliance with conditions of consent	42
6.	Comparison of impacts and performance against EIS predictions	61



7.		De	tails when performance goals not achieved	63
8.		Мо	pnitoring data trends	63
9.		En	vironmental management targets and strategies for the following 12 months	66
	9.	1	Independent Environment Audit	66
	9.	2 W	Vater Management	66



Table of Figure

Figure 1 - Widemere Recycling Location Map	. 12
Figure 2 - Widemere Recycling Reference Map	. 13
Figure 3 - Widemere Recycling – Map of Affected Areas	. 14
Figure 4 - Truck wash in operation	. 15
Figure 5 – Additional fixed water sprays on fixed plant	. 16
Figure 6 – Example of weed management activities conducted on site	. 16
Figure 7 – Example of additional wet suppression infrastructure installed	. 17
Figure 8 - Boral Recycling Widemere – Dust Deposition Monitoring and Meteorological	r
Station Locations November 2019 – November 2020.	. 28
Figure 9 - Widemere Recycling monthly deposited dust results for Site 2	. 31
Figure 10 - Widemere Recycling monthly deposited dust results for Site 3	. 32
Figure 11 - Location of dust gauges in relation to nearest residential receptors	. 32
Figure 12 - Gravimetric dust monitoring (Site 2) July 2003 – November 2020	. 65

Table of Tables

Table 1 Consent condition addressed in document	. 8
Table 2 - Statement of Compliance	. 9
Table 3 - DPIE Annual Review Guidelines Compliance Status key	. 9
Table 4 - Site contacts Widemere Recycling Facility	10
Table 5 - Widemere Recycling Facilities Approvals	15
Table 6– Compliance with EPL waste limits for material accepted and stored on site for	
the current reporting period	20
Table 7 - Widemere Recycling Operational Noise Limits	25
Table 8 - Dust Deposition Parameter Monitoring 2	28
Table 9 - Boral Recycling Dust Deposition Results	29
Table 10 - Results of the attended noise monitoring in June 2020	35
Table 11 – Historical compliance with EPL waste limits for material accepted and stored	
on site	38
Table 12- Compliance with Conditions of Consent. Boral Recycling Pty Ltd – Construction and Demolition Materials Recycling Facility, Widemere Road, Wetherill Park. DA -SSD 6525	n 43
	-
Table 13 - Comparison of impacts and performance against EIS predictions Table 14 – Historical water quality results obtained from EPL discharge point 2	64



1. Introduction

Background

Boral's Widemere Recycling facility (the facility) is located on Widemere Road, Wetherill Park. The facility is a construction and demolition waste recycling facility and produces a range of recycled products including road bases, aggregates and sands.

On 25th November 2002, The Minister for Planning granted development consent for a Construction and Demolition Materials Recycling Facility DA-21-1-2002-I. This was subsequently constructed and Boral Recycling Pty. Ltd. (Boral) commenced operations in July 2003.

On 17 November 2005 the site's development consent was modified (MOD-126-8-2005-I) to increase the capacity of the facility, alter operating hours and gain approval to install a blending plant. The blending plant was installed in early 2008.

On 25 November 2016, a new state significant development consent (SSD 6525) was issued by the NSW Department of Planning and Environment. This consent increased the capacity of the facility to receive or process up to 1,000,000 tonnes of waste per annum.

Purpose/Scope

This report has been prepared to address Annual Review (AR) requirements in accordance with Schedule D, condition D9 of Development Consent SSD 6525. Condition D9 is outlined below in Table 1, with reference to the section where an Annual Review requirement has been addressed in this document. This report accounts for the 12-month period between 25th of November 2019 and 24th November 2020 (the 'reporting period').



Table 1 Consent condition addressed in document

Condition	Condition Requirements	Where addressed in this report
D9	Within one year of the date of this consent, and every year thereafter, the Applicant shall review the environmental performance of the Development to the satisfaction of the Secretary. This review must:	Section 4
D9 (a)	Describe the Development that was carried out in the previous calendar year, and the Development that is proposed to be carried out over the next year;	Section 3
D9 (b)	(b) Include a comprehensive review of the monitoring results and complaints records of the Development over the previous calendar year, which includes a comparison of these results against the:	Section 4
D9 (b)(i)	The relevant statutory requirements, limits or performance measures/criteria;	Section 4
D9 (b)(ii)	Requirements of any plan or program required under this consent;	Section 4
D9 (b)(iii)	The monitoring results of previous years; and	Section 4.2
D9 (b)(iv)	(iv) The relevant predictions in the EIS;	Section 6
D9 (c)	Identify any non-compliance over the last year, and describe what actions were (or are being) taken to ensure compliance;	Section 5
D9 (d)	Identify any trends in the monitoring data over the life of the Development;	Section 8
D9 (e)	Identify any discrepancies between the predicted and actual impacts of the Development, and analyse the potential cause of any significant discrepancies; and	Section 8
D9 (f)	Describe what measures will be implemented over the next year to improve the environmental performance of the Development.	Section 3.4



2. Statement of Compliance

The statement of compliance for the current reporting period (25 November 2019 – 24 November 2020) is contained in Table 2 below:

Table 2 - Statement of Compliance

Were all conditions of the relevant approval(s) complied with?			
SSD 6525	Yes		

No non-compliances with the conditions of SSD 6525 were identified in the reporting period arising from Widemere recycling development activities.

The DPIE Annual Review Guidelines Compliance Status key outlined in Table 3 below.

Table 3 - DPIE Annual	Review	Guidelines	Compliance	Status ke	v
	1.0011011	Garaonnoo	o o i i i pila i i o o		3

Risk Level	Colour Code	Description
High	Non-compliant	Non-compliance with potential for significant environmental consequences, regardless of the likelihood of occurrence
Medium	Non-compliant	Non-compliance with: • potential for serious environmental consequences, but is unlikely to occur; or • potential for moderate environmental consequences, but is likely to occur
Low	Non-compliant	Non-compliance with: • potential for moderate environmental consequences, but is unlikely to occur; or • potential for low environmental consequences, but is likely to occur
Administrative	Non-compliant	Only to be applied where the non- compliance does not result in any risk of



environmental harm (e.g. submitting a report to government later than required under approval conditions)

Copies of the AR will be submitted to the DPIE and, once approved, made available to the public at on the Boral Recycling Widemere operations website. <u>https://www.boral.com.au/locations/ boral-recycling-widemere-wetherill-park</u>

Key contacts associated with the management of the Boral Recycling Widemere, environment, safety and stakeholder relationships are provided in Table 4.

Contact	Position	Contact Details
Philip Paterson	Widemere Site Manager	(02) 9604 9101
		Èmail:
		Philip.paterson@boral.com.au
Angus Shedden	Recycling Operations	(02) 9604 9101
	Manager NSW/ACT	Èmail:
	_	angus.shedden@boral.com.au
Shoanne	Environment Manager	Tel: (02) 9033 5019
Labowitch	NSW/ACT	Email:
		Shoanne.labowitch@boral.com.au
Jenny Smillie	Stakeholder Relations	Tel: (02) 9033 5215
	Manager	Email: jenny.smillie@boral.com.au

Table 4 - Site contacts Widemere Recycling Facility



3. Development overview

3.1 Widemere Recycling Operations

The Widemere Recycling Facility, owned and operated by Boral Resources (NSW) Pty Ltd, is located at Widemere Road, Wetherill Park in the Fairfield Council Local Government Area. The facility covers approximately 8 ha and comprises a weighbridge, office and amenities, spotter stations, receivals area, stockpiles, processing areas, water management areas and internal haul roads. The facility is a construction and demolition waste recycling facility and separates, crushes and blends construction and demolition waste with quarry material to produce a range of recycled products including road bases, aggregates and sands.

The site was formerly a quarry between 1924 and 2002. From around 1975 to 1997 there was also an asphalt plant and associated stockpiling on the site. The site was used for stockpiling gravel and other construction materials from 1997 to 2002. During the reporting period 597,697 tonnes of material was received with 717,332 tonnes sold after processing. A maximum of 143,614 tonnes of material was stored on site at any one time during the current reporting period, which occurred during April 2020.

The relevant features of the site during the reporting period, including site location, onsite elements and a map of the affected area are depicted in Figures 1, 2 and 3, respectively.



Figure 1 - Widemere Recycling Location Map

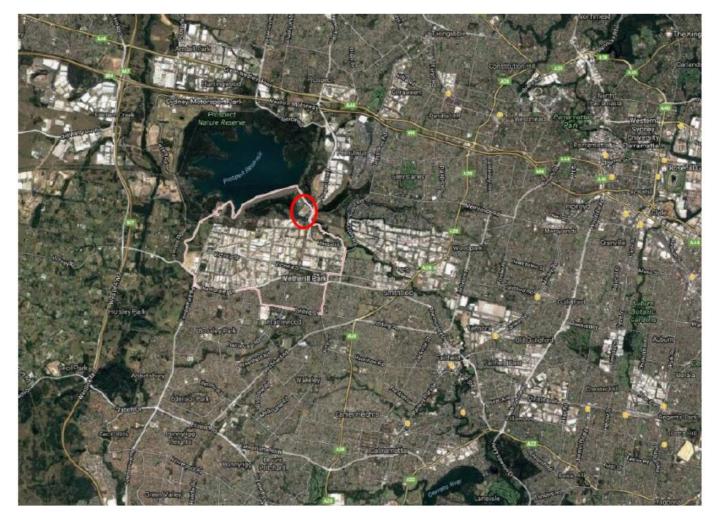




Figure 2 - Widemere Recycling Reference Map

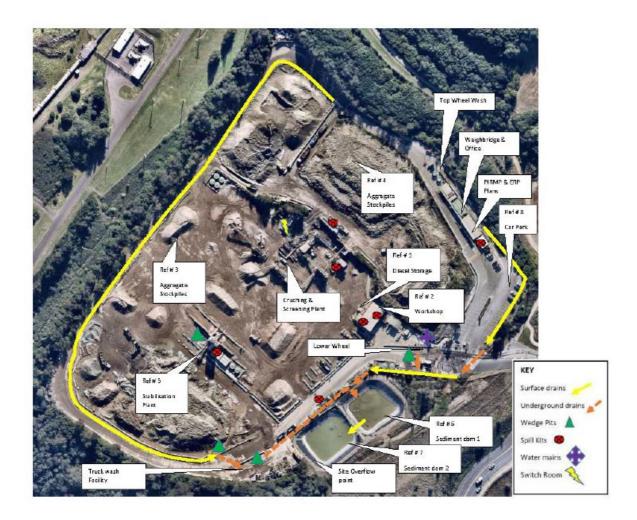




Figure 3 - Widemere Recycling - Map of Affected Areas





3.2 List of Relevant Approvals

A summary of all the relevant approvals relevant to the Widemere Recycling Facility are provided in Table 5 below:

Approval Type	Approval Authority	Approval No.	Date Granted
Development Consent	Department of Planning & Environment	SSD 6525	25/11/2016
Environment Protection Licence	Environment Protection Authority	11815	21/02/2003

Table 5 - Widemere Recycling Facilities Approvals

3.3 Operations over reporting period

Production at Widemere Recycling Facility during the reporting period was recorded at 674,011 tonnes. During the reporting period 597,697 tonnes of material was received with 717,332 tonnes sold after processing. A maximum of 143,614 tonnes of material was stored on site at any one time during the current reporting period, which occurred during April 2020.

A total of 319 loads were rejected during the reporting period for loads that contained material that could not be accepted at the site.

Activities that would trigger the commencement of expanded operations (defined in SSD 6525 as "The point at which throughput exceeds 750,000 tonnes per annum of waste and receival of additional waste streams occurs at the site") did not occur during the current reporting period.

Throughout the last 12 months, a number of initiatives have been introduced to improve performance of the facility. These include:

• Truck wash has been completed and commissioned, see Figure 4 below



Figure 4 - Truck wash in operation



 Various new sprinklers have been installed to improve dust suppression around the site including on fixed plant, see Figure 5 below"



- Figure 5 Additional fixed water sprays on fixed plant
 - Weed management has been carried out around the site. Before and after photos are shown as per Figure 6 below.



Before



After

Figure 6 - Example of weed management activities conducted on site



 Wheel wash at the top of the plant has been upgraded with new water tanks and sprays, see Figure 7 below





Figure 7 – Example of additional wet suppression infrastructure installed

 Continued environmental compliance has been monitored through the use of the Environmental Permit Planner (EPP) tool, which is utilised as a monthly miniaudit tool covering environmental management, monitoring and regulatory compliance aspects relevant to the site. Further auditing of the process is achieved through EPP verifications, which are mini audits conducted by a nonsite-based Boral employees to verify the EPP tasks are being conducted to an acceptable standard.

3.4 Proposed operations for next reporting period

It is anticipated that the volumes of waste received and processed at the Widemere facility and any other relevant activities may trigger the commencement of expanded operations (defined in SSD 6525 as "The point at which throughput exceeds 750,000 tonnes per annum of waste and receival of additional waste streams occurs at the site") towards the end of the next reporting period.

Further controls are proposed for the site in the 2021 reporting period. These include:

- Upgrade of the remote surveillance vehicle and associated monitoring facilities, which are implemented to undertake inspections of receivals for potential contaminated material at the stockpile locations, whilst ensuring the safety of the operator.
- Boral's Inspection and Receivals Protocol will be reviewed and updated, as required.
- The OEMP and surface water management plans for the site will be reviewed and updated, as required, following finalisation of the Independent Audit Report and this Annual Return.



- The HDPE liner in the sediment basin will be assessed to ensure it meets the permeability requirements under condition C37.
- The Pollution Reduction Program currently in place on EPL 11815 will be advanced to satisfy the relevant subconditions under condition U1 of the licence.
- As part of the site's continual improvement program, the site will monitor the current control methods relating to dust, noise, waste management and traffic management and where necessary update and modify existing controls.
- In consideration of compliance with relevant noise criteria for the noise monitoring undertaken on an annual basis, it is proposed that future noise monitoring will occur in response to any changes in operations or in response to a confirmed noise complaint.
- In consideration of the potential trigger to expanded operations towards the end of the next reporting period, Boral will commence reviewing the existing plans and procedures to confirm they adequately address any potential increased impacts associated with the increased volumes processed at the site. This will include the implementation of plans and audits that are triggered within six months of the commencement of the expanded operations. Specifically, this includes the completion of an air quality audit, groundwater monitoring program and the implementation of a driver code of conduct.

4. Environmental monitoring results and complaints records

4.1 Relevant statutory requirements and performance criteria

4.1.1 Waste Monitoring

Appendix A of the OEMP, prepared May 2018, contains the waste monitoring program for the Widemere site (EMM, December 2017). The waste monitoring program addresses Condition C1 of SSD 6525 and details the methodologies and mitigation measures for waste monitoring at the site.

Relevant monitoring requirements described in the waste monitoring program are summarised below and form part of the sites standard operating procedures:

- Receivals Account Manager to communicate and monitor of source sites, as required.
- Site to adhere to the receivals procedure including:
 - $\circ~$ Customer details identified and recorded.
 - All loads inspected, classified and weighed prior to tipping. Any loads rejected at this point are turned away and details entered into the rejected loads register.
 - Upon successful initial inspection at the weighbridge, a three-part docket is issued to the customer.
 - The docket signed by the receivals clerk is provided by the driver to the "spotter" prior to tipping with a copy retained at the weighbridge.

- The "spotter" inspects the load once it has been unloaded at the designated raw feed stockpile. Any unexpected material that cannot be accepted at the facility will then dealt with according to the inspection and receivals protocol. Any rejected material is detailed in the rejected loads register.
- For accepted material, the "spotter" signs the docket to verify the material can be accepted and is suitable for inclusion in the raw feed stockpile.
- A copy of all dockets is maintained on site in the office for future reference.

As materials are delivered to site, and prior to their acceptance and receival on site, all materials are checked in accordance with the waste monitoring program described above, along with the NSW EPA Minimum Standards for Managing Construction and Demolition Waste in NSW, including verification of their origin, as per the following checks:

- Undertaking independent checks on material origin prior to receival on site. This includes ensuring compliance in relation to material separation and handling
- Verification of source materials by obtaining appropriate clearance certificates (e.g. site clearance audits, asbestos clearance) where required
- Monitoring and tracking of materials received on site by:
 - Truck registration; company name; driver signature; material origin and load weight
 - Visual inspection of loads (weighbridge & receivals area)
 - Rejecting and recording unsatisfactory loads and maintaining a 'rejected loads register' for loads that cannot be accepted on site

The use of the Inspection and Receivals Protocol for recycling has been prepared for the site to ensure relevant legislative and approval requirements are met, this document is reviewed annually. The protocol details the actions to be taken in the event suspected contaminated material is encountered.

Boral Recycling retains the services of occupational hygiene contractors, to advise on matters relating to the safe handling of potential hazardous material in construction and demolition waste. The Widemere occupational hygiene contractor are Hibbs and Associates Pty Ltd.

A summary of the volumes of waste accepted at site for current reporting periods is summarised in Table 6. The table references the waste limits described in Condition L4 of EPL 11815.



Relevant condition	Waste Type	Limit	2020 data					
L4.1	Garden waste	1,000 tonnes stockpiled onsite at any one time.	No garden waste is accepted on site. Any garden waste received is rejected and detailed in the rejected loads register					
L4.1	Soils	Arsenic 40mg/kg; Cadmium 2mg/kg; Copper 200mg/kg; Mercury 1.5mg/kg; Zinc 600mg/kg; Petroleum Hydrocarbons C6-C9 150mg/kg; Petroleum Hydrocarbons C10-C36 1600mg/kg; Polycyclic aromatic hydrocarbons 80mg/kg; Polychlorinated biphenyls (individual) 1mg/kg. No Acid Sulfate Soil or Potential Acid Sulfate Soil is to be received at the Premises.	CT1 soil is pre-classified by an Independent geotechnical contractor prior to acceptance and copies of classification maintained and stored. No CT1 soils are accepted on site if they are not found to be compliant with limits described.					
L4.2	The authorised amount of waste permitted on the premises cannot exceed 750,000 tonnes at any one time	750,000 tonnes of waste at any one time	Maximum amount stored onsite 143,614 tonnes (April 2020)					
L4.3	The Licensee must not receive on the Premises, more than 1,000,000 tonnes of waste per year.	1,000,000 tonnes of waste per year.	 597,697 tonnes of material was received during the 2020 reporting period. Heights of stockpiles remain 20m below ground level, monitored using height marker on stabilisation plant, 6 monthly flyovers. 					
L4.4	The height of any stockpile of any material on the Premises, must not exceed twenty (20) metres above ground level.	> 20m AGL						
L4.5	No asbestos waste is to be accepted or stored at the premises.	0	Any fibruous material detected during three point inspection protocol is rejected and details entered in the rejected load register stored on site.					

Table 6– Compliance with EPL waste limits for material accepted and stored on site for the current reporting period



4.1.2 Dust Management

Appendix C of the OEMP, prepared May 2018, contains the dust management plan for the Widemere site (Ramboll Environ, November 2017). The dust management plan addresses Condition C17 of SSD 6525 and details the methodologies and mitigation measures for dust and air quality management at the site.

Relevant monitoring requirements described in the dust management plan are summarised below:

Condition M2 of the EPL for the facility identifies the air quality monitoring requirements for the facility, which are the continuous monitoring of particulates (deposited matter), in accordance with method AM-19 (NSW EPA, 2007).

Dust deposition rates are recorded at two locations at the facility and are depicted in Figure 8:

- DDG1 southeast corner of site near the pond (site 3); and
- DDG2 southwest corner of the site (site 2).

For assessment against regulatory compliance, insoluble solids are compared to the criteria of 4g/m²/month as an annual average. Therefore, a complete 12-month period of dust deposition monitoring is required to assess compliance.

For the purpose of the project, a sample with a high ash content relative to the insoluble solids may be indicative of the influence of emissions from the facility.

In the event of an insoluble solids result above the criteria obtained for an individual month, the following steps are taken:

- A review of the sample ash content is conducted,
- In the event that the sample information indicates that site operations were a contributing source (elevated ash content relative to insoluble solids content), meteorological conditions and operations during that month are reviewed, with the aim to identify the contributing emissions source or activity; and;
- Applicable management practices will be reviewed and improved as required.

In regards to compliance with the requirements of the plan during the current reporting period, the data collected each month is presented as part of the pollution monitoring data for the site and uploaded to the Boral website (<u>https://www.boral.com.au/our-commitment/environmental-reporting</u>) within 14 days of the results being received from the NATA accredited laboratory.

During the current reporting period, dust monitoring reporting was conducted in accordance with the Dust Management Plan with the data presented in Section 4.2.1.



This includes review of the ash content of the samples when the insoluble content exceeded the $4g/m^2/month$ criteria as described in Section 4.2.1.

Condition O6.3 of the EPL requires that a meteorological station is established and maintained onsite that complies with the requirements of the NSW EPA (2007). The location of the on-site meteorological station is depicted in Figure 8.

To ensure the ongoing effectiveness of measures described in the dust management plan, the performance of all onsite mitigation measure technology is routinely checked and serviced to maintain ongoing performance to original specifications. Weekly site inspections are carried out by the site manager, site supervisors and leading hands, which are a visual inspection of sprays while they are operating. The weekly site inspections include checking that water sprays are on and that dust suppression measures are operating effectively in the stockpile yard. Any non-operational sprays are reported via the weekly inspection and repaired /replaced as required.

Mitigation of fugitive dust emissions on site has been an area of emphasis since the commencement of operations. Sources of dust include the crushing facility, materials stockpiles, vehicular movement on unsealed roads, and product transfer.

A number of existing controls are in place throughout the facility. The current dust controls used on site include:

- Watering all roads within the facility with a water cart. The water cart is equipped with a cannon which reaches to the vertical extent of stockpiles and power to wash and scrub hard surfaces
- Use of water sprays and sprinklers on stockpiles, receivals area, sales area, and on fixed plant
- Cessation or reduction in dust generating activities during periods of high potential for offsite dust migration e.g. high winds
- Wheel washing facilities (x 2), equipped with cattle grids, at raw materials exit (bottom wheel wash) and product sales exit (top wheel wash)
- Sealed internal roads from the wheel wash to the point of exit
- Primary feed bin sprays installed and operated manually
- Increased surface area of sealed internal roads and reparation of damaged roads (this is an ongoing process with the site undertaking works when a load of over-ordered, or out of RMS specification, hot mix asphalt is delivered to site)
- Operational cameras installed around the site with video monitoring within the operations manager's office
- Impact crusher has been enclosed and fitted with a water misting system

- Water tank at receivals area to provide an independent water source to ensure adequate supply & coverage at all times
- Recycled water tanks installed on site to assist with site water management capacity and dust suppression
- The regular use of a street sweeper on the site and also along sections of Reconciliation Drive
- Back haul road use minimises dust creation from trucks
- Dust suppression pumps in dams to assist around the site
- New upgraded water collection/sediment dams have increased water storage capacity on site

4.1.3 Storm Water Management

The sedimentation basins installed in the south eastern corner of the site are designed to capture dry and wet weather flows. Markers have been installed to ensure that the capacities of the basins are maintained for a 90th percentile 5-day rainfall event.

No controlled discharges occurred over the reporting period (storm water detention basins are maintained to ensure adequate capacity to hold a 90th percentile rain event over 5 days). Water captured in the detention basins is reused on site for dust suppression or for use in the blending plant. The overflow pond, Dam 2, is maintained at levels that allow the maximum volume of water storage.

Water management system upgrades were completed in 2019, which included enhanced basins sizes with HDPE liners to meet the permeability requirements of the consent. Installation of an impervious HDPE liner, and additional water storage tank infrastructure have demonstrated that the water management system and operational practices are effective in restricting overflows to significant rainfall events, which generally comprise 120 mm or more of rainfall. When overflows do occur, they are expected and have been observed to cease within 1 to 2 days. As a result, overflows will only occur during periods of elevated streamflow in Prospect Creek, enabling rapid mixing and dilution to occur. Previous water sampling of Prospect Creek confirms this, providing evidence that any unmanaged discharge would be unlikely to cause or threaten material harm.

During the reporting period, unmanaged overflow events occurred on two occasions when the 5-day rainfall event volume exceeded 120 mm. During this time, discharge water sampling from the designated discharge point was not possible due to safety concerns arising from the volume of water leaving the site due to significant rainfall.

There is currently a Pollution Reduction Program (PRP) in place under the Environment Protection Licence EPL 11815, which prevents controlled discharge from occurring and that is currently being addressed by Boral in consultation with the NSW EPA through the



finalisation of the Surface Water Management and Mitigation Plan and associated water quality management plans required under the PRP.

4.1.4 Noise Management

Initially noise modelling was undertaken and measured by EMM from 2nd to 15th May 2014 as part of the noise impact assessment (NIA) that accompanied the environmental impact statement, prepared to support the 2015 consent modification for increased capacity of the facility. Based on the NIA modelling results, it was determined that the noise emissions arising from the proposed modification would satisfy the project specific noise levels (PSNLs) at all assessment locations.

Operational noise limits provided in Condition C7 of Development Consent SSD 6525 are based on those limits provided in the NIA, as well as operational noise predictions and are consistent with those described in Condition L5.1 of EPL 11815. It is noted that there are no cumulative noise criteria specified in either the Development Consent SSD 6525 or EPL 11815 and no noise or vibration monitoring is required under EPL 11815.

The noise impact assessment conducted by EMM (2014) included noise monitoring at 10 locations in the vicinity of the operation with the following results:

- Operational noise modelling results were assessed and found to be below the Project Specific Noise Levels (PSNLs) at all 10 locations.
- Sleep disturbance assessment results for operations between 10pm and 6am were below the relevant criteria at all 3 of the monitoring locations assessed for sleep disturbance.
- Construction noise assessment results were assessed against operational PSNLs + 5 dB(A) and the results showed that that the construction noise levels associated with the facility would be below the relevant construction noise criteria at all residential assessment locations.
- A cumulative noise (intrusive noise + 3 dB (A)) assessment was conducted to assess the worst case noise generated from site, combined with estimated background industrial noise in the area. The results indicated a noise level increase of 1 dB (A) associated with the proposed upgrades which is considered negligible and within the acceptable criteria.
- A traffic noise assessment was conducted for the nearest residential receptors to the site in Hassall Road. Additional traffic generated noise associated with the proposal was expected to be less than 1 dB which is considered negligible.
- The conclusion of the noise assessment was that any changes to noise emissions from the site as a result of the proposed changes to the DA conditions would be negligible to minimal. Furthermore, all results from the noise assessments conducted were within the acceptable relevant criteria.

There are a number of techniques that are used to minimise unnecessary noise on site. These are contained in the site's noise management plan (NMP) which was compiled by EMM and was included in Appendix B of the site Operational Environmental Management Plan (OEMP) approved on 28 May 2018. Some of the measures include:

- regular servicing and maintenance of fixed and mobile plant to ensure the equipment is operating to specification,
- incorporation of advanced and affordable technology to minimise noise from equipment, plant and machinery used on site,
- restricting movement of equipment on exposed areas,
- locating noisy equipment behind structures that act as barriers, or at the greatest distance from recognised noise sensitive areas,
- orienting equipment so that noise emissions are directed away from any sensitive areas,
- employing 'quiet' practices when operating equipment e.g. positioning idling trucks in appropriate areas,
- using low tonal reversing alarms (which limit the acoustic range of the warning) to warn of vehicles reversing,
- pursuing efficient muffler design on relevant equipment,
- barriers (in the form of freestanding walls, earth mounds or bunds or placing acoustically significant equipment in trenches or cuttings).

The site-specific operational noise limits provided in the NMP and as per consent condition C.6 of SSD 6525 are outlined in Table 7 below.

Location .		Day (7am – 6pm)	Evening (6pm – 10pm)	Night (10	Morning shoulder (6am – 7am)							
		L _{Aeq,15} minute	LAeq,15 minute	LAeq,15 minute	LFmax(15 minute)	LAeq,15 minute						
71 Mu	inro St, Greystanes	39	38	35	50	39						
146 Da	aruga Ave, Nelsons Ridge	35	35	35	50	35						
Greystanes Estate – Future southern extent ¹		39	37	35	50	39						
Votes:	1.Identified as Location R10 in Widemere Recycling Facility – Noise Impact Assessment (NIA) prepared by EMGA Mitchell McLennan (Ref J13127RP1 dated 27 April 2015).											
	2. Noise generated by the Development is to be measured in accordance with the relevant procedures and exemptions (including certain meteorological conditions) of the Industrial Noise Policy.											

Table 7 - Widemere Recycling Operational Noise Limits

The NMP (EMM, October 2017) prepared to support the Widemere OEMP (Appendix B) includes site noise management strategies in line with Condition C9 of SSD 6525 including but not limited to:

• Implementation of best management practices, including all reasonable and feasible noise management and mitigation measures to prevent and minimise operational, low frequency and traffic noise generated by the site.



- Minimise the noise impacts of the development during adverse meteorological conditions.
- Maintain the effectiveness of any noise suppression equipment on plant at all times and ensure defective plant is not used operationally until fully repaired.
- Regularly assess any noise monitoring data and relocate, modify and / or stop operations to ensure compliance.

4.1.5 Visual Controls

The OEMP covers the maintenance of bund walls, tree plantings, and minimising visual dust using water sprays. All of these have been managed over the last year, using landscape contractors to control weeds around the site and replant trees where required, and the use of sprinklers on exposed areas to reduce dust generation.

In accordance with the conditions of EPL 11815 (L4.4), the facility does not allow any stockpile heights greater than 20 m to ensure a safe working environment in operational areas and to maintain the visual amenity of the site.

The site previously planted a screen of trees to assist in enhancing the visual amenity along the site frontage. Weed control and regular plantings will be ongoing to ensure that this tree screen remains effective.

The site will continue to investigate other ongoing future planting and ongoing weed control.

4.1.6 Traffic Management

The OEMP covers internal traffic management and the loading and unloading of materials restricted to the property boundary. This is managed through the implementation of a traffic management plan which has separate internal routes for deliveries and sales. Additionally, there is a Transport Code of Conduct which identifies routes used by vehicles entering and exiting the site, as well as expected driver behaviour.

The OEMP stipulates that vehicle speeds on unsealed areas are to be kept to a practical minimum to avoid dust emissions and internal roads are continually sprayed using a water cart.

The Traffic and Pedestrian management system was updated for the site in 2020. This is to ensure pedestrians moving around the site are safe and separate to the traffic of vehicles driving around the site. Continuous improvements of the Traffic and Pedestrian management system was completed during the 2020 reporting period.



4.1.7 Site Security

All fencing around the site is maintained to restrict unauthorised access to the site as per the OEMP. A security contractor performs random patrols on the property and the facilities include back to base monitoring.

The site has also in operation surveillance cameras around the processing plant, picking huts, weighbridge, car parks and site stockpiling areas.

4.1.8 Refuelling

Refuelling of machinery and vehicles used on site is carried out as per the OEMP.

Absorbent materials are available to soak up minor spills. The site contains a 12,500L double skinned above ground diesel tank that is used for onsite refuelling of plant and equipment. The integrity of the 12,500L double skinned tank is inspected regularly.

4.1.9 Waste Disposal and Sewage Management

Solid waste management includes non-recyclable raw materials, recyclable steel reinforcing materials, domestic garbage and spill material (if a spill was to occur). All these materials are disposed of at appropriately licensed waste facilities. Less than 0.5% by weight of all materials received on site is disposed of at landfill.

The sewage management on site is controlled by an Econocycle unit which is inspected and maintained routinely by a qualified contractor. Treated water from the system is used as non-potable water around the site to irrigate tree and shrub plantings.

4.2 Monitoring requirements

4.2.1 Dust Management

Gravimetric gauges have been placed in the following locations, which are illustrated in Figure 8;

- (2) At the south west corner of the site (EPL license point).
- (3) At the south east corner of the site, adjacent the sedimentation basins.





Figure 8 - Boral Recycling Widemere – Dust Deposition Monitoring and Meteorological Station Locations November 2019 – November 2020.

Dust monitoring is undertaken in accordance with the requirements of Table 8 below, as per section 4.4 of the development consent.

Pollutant/Parameter	Discharge Point	Method	Frequency
Particulate Matter	g/m²/month	AM-1, AM-	Continuous
(deposited matter)		19	

Table 8 - Dust Deposition Parameter Monitoring

Dust collection and testing is conducted as per the NSW EPA Approved Method 19 – AS 3580.10.1 *Methods of sampling and analysis of ambient air; Determination of particulate Deposited Matter – Gravimetric Method.*

Sample analysis was performed by Boral Materials Technical Services, which is a NATA Accredited Laboratory (No: 9968).

The 12-month rolling average for the current and past reporting periods is shown in Table 9, where a decrease in the rolling average for ash has been observed over subsequent reporting periods.



Monitoring Points Test Method AM 19	Mar 2011 – End Feb 2012 Av (g/m2/mth): Ash	Mar 2012 – End Feb 2013 Av (g/m2/mth): Ash	Mar 2013 – End Feb 2014 Av (g/m2/mth): Ash	Mar 2014 – End Feb 2015 Av (g/m2/mth): Ash	Mar 2015 – End Feb 2016 Av (g/m2/mth): Ash	Mar 2016 – End Feb 2017 Av (g/m2/mth): Ash	Dec 2016 – Nov 2017 (g/m2/mth): Ash	Dec 2017 – Nov 2018 (g/m2/mth): Ash	Dec 2018 – Nov 2019 Av (g/m2/mth): Ash	Dec 2019 – Nov 2020 Av (g/m2/mth): Ash
2. SW Corner**	3.64	2.70	4.03	4.79	3.90	5.25	6.4	4.45	4.15	3.19
3. SE Corner near Sediment Basins	4.27	3.38	4.76	4.09	5.41	5.23	5.3	4.96	4.27	3.50

** EPL 11815 Licensed monitoring point Table 9 - Boral Recycling Dust Deposition Results



In interpreting the results presented in Table 9, it is necessary to refer to the *NSW EPA Approved Methods and Guidance – For the Modelling and Assessment of Air Pollutants in NSW.* The impact assessment for dust is listed as the maximum annual average of deposited dust being $4g/m^2/mth$ for insoluble solids. Section 10 of the Gravimetric Method standard indicates that the accuracy of the method is +/-20% on monthly average for insoluble solids.

Throughout the reporting period, the gauges have recorded insoluble solids above the limit of 4g/m²/month on a number of occasions. These gauges are located on the operating site and are on occasions influenced by localised dust generating activities. To that extent, the recorded fallout rates are not necessarily representative of off-site dust levels or even widespread dust levels on the site.

Due to the physical nature of construction and demolition materials, it is generally accepted that the ash level (sample heated to 850 degrees Celsius for 30 minutes, as per the standard), may be used as a measure to reduce the impact arising from detecting other sources of organic deposited matter. These organic sources usually include insects, bird droppings, pollen, grass seed etc. Ash in the standard is defined as 'the mass of that portion of the insoluble matter remaining after combustion.

When reviewing dust data obtained for the previous reporting periods and presented in Table 9, a decrease of the ash level at dust gauge #2 (EPL location) and site #3 has been observed. This indicates that the dust generation minimisations activities at the site have been effective in reducing the annual dust levels. Dust monitoring locations are located in highly active operational areas on site, within the surrounding tree screen, and are not necessarily considered indicative of offsite dust concentrations.



A summary of the monthly sampling results obtained from the dust deposition gauges for the current reporting period for Site 2 and Site 3 are presented in Figure 9 and Figure 10, respectively, below.

The site is surrounded to the west by the Prospect reservoir, to the south and north by commercial / industrial developments and to the east by open space and recreational land use. There are no sensitive or residential receptors in close proximity to the site and therefore, the risk of dust generating activities impacting human or ecological receptors is considered low. An illustration of the location of dust deposition gauges in reference to nearest residential receptors is provided in Figure 11 below.

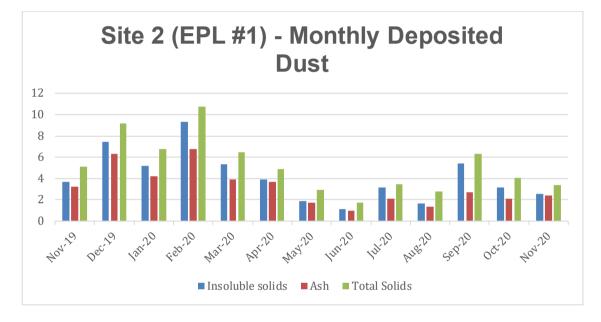


Figure 9 - Widemere Recycling monthly deposited dust results for Site 2

BORAL

Build something great™

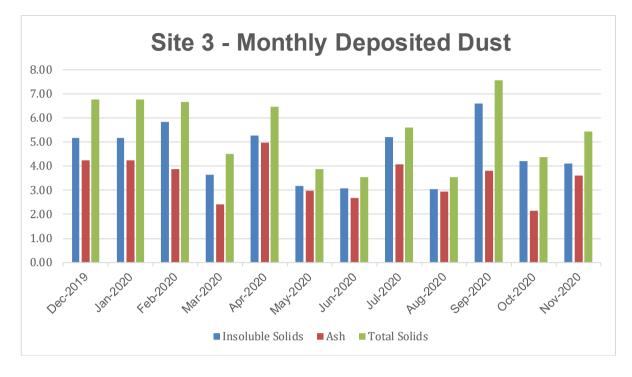


Figure 10 - Widemere Recycling monthly deposited dust results for Site 3



Figure 11 - Location of dust gauges in relation to nearest residential receptors



4.2.2 Noise Monitoring

Noise monitoring is undertaken at annually, and as required following noise related complaints or significant changes to site operations, as per the recommendations of the NMP. It is proposed that the NMP is revised to amend the requirement of nosie monitoring to occur either when there is a change to operations (i.e. the commencement of expanded operations), or a complaint is received. This change is based on subsequent years of compliant noise monitoring results.

The OEMP and NMP plan was approved by the Department on 28 May 2018 and the second round of attended noise monitoring was undertaken in May 2020.

The results from the attended noise conducted May 2020 are summarised below:

- The applicability of noise criteria was assessed with reference to weather data from the nearest Bureau of Meteorology Automatic Weather Station (Horsley Park Equestrian Centre).
- Attended noise monitoring observations and results demonstrate that operational noise from the site was inaudible during all monitoring periods, except for during the evening and night periods at location 4. If a noise source is inaudible, it is generally 10 dB below the background (L_{A90}) noise level. Where site noise was audible, contributions at assessment locations satisfied the relevant noise limits.
- In summary, the measured site L_{Aeq} (15 min) noise contribution was found to satisfy the relevant DA/EPL noise limits at all locations.
- Further, the DA/EPL night period L_{Amax} limit of 50 dB was satisfied during the morning shoulder and night periods.

Detailed results from the noise monitoring activity are outlined in Table 10 below.



Location ID	Period	Start time	Meteorological condition ¹	1	Total noise	e levels, dE	3		ted site ution, dB	DA/EPL	Limits, dB	Exceedance, dB	Notes
			EPL limits apply (Y/N)	L _{Amin}	L _{A90}	L _{Aeq,} 15 min	L _{Amax}	L _{Aeq,} 15min	L _{Amax}	L _{Aeq,} 15min	L _{Amax}	-	
3	Morning shoulder	6:24am	0.6m/s NW, scattered clouds Y	46	48	52	80	IA	IA	39	50	Nil	Site inaudible. Other ambient noise sources included: constant traffic on Prospect Highway, frequent traffic on Gipps Road, one local vehicle pass- by, occasional birdsong, one aircraft overflight and a neighbour's dog barking.
	Day	7:22am	1.1m/s NW, scattered clouds Y	46	48	56	80	IA	n/a	39	n/a	Nil	Site inaudible. Other ambient noise sources included: constant traffic on Prospect Highway, frequent traffic on Gipps Road, two local vehicle pass- bys, frequent birdsong, leaves rustling in trees and a neighbour's dog barking.
	Evening	9:12pm	1.9m/s NNW, light cloud cover, Y	42	43	46	65	IA	n/a	38	n/a	Nil	Site inaudible. Other ambient noise sources included: constant traffic on Prospect Highway, occasional traffic on Gipps Road, one aircraft overflight and leaves rustling in trees.
	Night	10:21pm	3.1m/s NNW, light cloud cover N	41	43	45	69	IA	IA	35	50	N/A	Site inaudible. Other ambient noise sources included: constant traffic on Prospect Highway, occasional traffic on Gipps Road and leaves rustling in trees.

Location I ID	Period	Start time	Meteorological condition ¹	Total noise levels, dB			Estimated site contribution, dB		DA/EPL Limits, dB		Exceedance, dB	Notes	
			EPL limits apply (Y/N)	L _{Amin}	L _{A90}	L _{Aeq,} 15 min	L _{Amax}	L _{Aeq,} 15min	L _{Amax}	L _{Aeq,} 15min	L _{Amax}	-	
4	Morning shoulder	6:45am	1.1m/s NW, scattered clouds Y	42	44	50	69	IA	IA	39	50	Nil	Site inaudible. Other ambient noise sources included: constant traffic on Prospect Highway, bicycle and joggers passing by, Gipps Road traffic, persistent birdsong, insects, frogs and one helicopter overflight.
	Day	7:01am	1.1m/s NW, scattered clouds Y	43	44	47	60	IA	n/a	39	n/a	Nil	Site inaudible. Other ambient noise sources included: constant traffic on Prospect Highway, bicycle and joggers passing by, Gipps Road traffic, persistent birdsong, insects, frogs and three aircraft overflights.
	Evening	9:45pm	2.5m/s NNW, light cloud cover Y	37	39	41	56	<34	n/a	37	n/a	Nil	Site only just audible during lulls in traffic noise, including machinery revving and crushing plant. Other ambient noise sources included: frequent traffic on Prospect Highway, persistent insects, occasional traffic on Gipps Road and one aircraft overflight.



Location ID	Period	Start time	Meteorological condition ¹	Το	tal noise l	levels, dB		Estimat contribu		DA/EF	L Limits, dB	Exceedan dB	ice, Notes					
			EPL limits apply (Y/N)	L _{Amin}	L _{A90}	L _{Aeq,} 15 min	L _{Amax}	L _{Aeq,} 15min	L _{Amax}	L _{Aeq,} 15min	L _{Amax}							
	Night	10:00pm	3.1m/s NNW, light cloud cover N	38	39	42	58	<34	38	35	50	N/A	noi cru	e only just audible during lulls in traffic ise, including machinery revving and ishing plant.				
													fre per	her ambient noise sources included: quent traffic on Prospect Highway, rsistent insects, occasional traffic on Gipps ad and one aircraft overflight.				
5	Morning	6:00am	0.6m/s NW,	40	41	43	57	IA	IA	35	50	Nil	Site	e inaudible.				
	shoulder		scattered clouds Y										cor tra by,	her ambient noise sources included: nstant traffic on Prospect Highway, frequent ffic on Gipps Road, one local vehicle pass- occasional birdsong and one aircraft erflight.				
	Day 7:46am		1.7m/s NW,	42	44	49	69	IA	n/a	35	n/a	Nil	Site	e inaudible.				
			scattered clouds Y										cor occ	her ambient noise sources included: nstant traffic on Prospect Highway, casional traffic on Gipps Road, two local nicle pass-bys and persistent birdsong.				
	Evening	8:50pm	1.7m/s N,	37	39	42	63	IA	n/a	35	n/a	Nil	Site	e inaudible.				
			light cloud cover Y										cor occ veh	her ambient noise sources included: nstant traffic on Prospect Highway, casional traffic on Gipps Road, one local nicle pass-by, leaves rustling in trees and casional neighbour activities (doors, talking c).				
Location ID	Period	Start time	Start time	Start time	Start time	Start time	Meteorological condition ¹		Total noi	ise levels,	dB	Estimated si contribution,					edance dB	e, Notes
			EPL limits apply (Y/N)	L _{Amin}	L _{A90}	L _{Aeq,} 15 min	L _{Ama}	K L _{Ae} 15m		max	L _{Aeq,} L _A 15min	Amax						
	Night	10:43pm	3.1m/s N,	41	43	56	81	IA	. 1	A	35 5	50	N/A	Site inaudible.				
			light cloud cover N											Other ambient noise sources included: constant traffic on Prospect Highway, occasional traffic on Gipps Road, leaves rustling in trees and one helicopter over				

Table 10 - Results of the attended noise monitoring in June 2020

Attended noise monitoring was also conducted 18 April 2019. Where the applicability of noise criteria were assessed with reference to weather data from the sites automatic weather station. A summary of findings from the monitoring event are presented below:

- Attended noise monitoring observations and results from the 2019 monitoring event demonstrated that operational noise from the site was inaudible during all monitoring periods when the site was operating. If a noise source was inaudible, it was generally 10 dB below the background (L_{A90}) noise level. The site was not in operation during the evening and night periods during the 2019 sampling event. As such, the DA/EPL night period maximum (L_{Amax}) limit of 50 dB was satisfied during the morning shoulder period as the site was inaudible and was not relevant during the night period as the site was not operating.
 - In summary, the measured site L_{Aeq} (15 min) noise contribution was found to satisfy the relevant DA/EPL noise limits at all locations.



In consideration of the site's compliance with relevant noise criteria for the noise monitoring undertaken on an annual basis for two successive years, it is proposed that future noise monitoring will occur in response to any changes in operations or in response to a confirmed noise complaint.

4.2.3 Surface Water Quality

During the reporting period there were no controlled discharges of water off site. Storm water collected during rain events in the two basins and 13 x 30KL water tanks is harvested and re-used for dust suppression and/or used in the blending plant.

At present and during the reporting period, approval to undertake controlled discharges under EPL 11815 has been temporarily removed by the EPA in order to undertake further investigations into the sites detention water quality as per the Pollution Reduction Program (PRP) contained in Section U of EPL 11815. This was also the case for the previous reporting period, hence no water quality monitoring data is available to be presented in these reports.

Boral agreed to the inclusion of the following PRPs on their EPL as part of the licence variation issued 11 November 2016, which were subsequently submitted to the Department of Planning and Environment (DPE) and the NSW EPA on the 1st May 2017;

- Surface Water Characterisation Assessment (as per EPL 11815 PRP U1.2-U1.4).
- Surface Water Monitoring and Mitigation Plan (as per EPL 11815 PRP U1.5 U1.9).

The Surface Water Characterisation Assessment was submitted to the EPA on 4 April 2017, with the Surface Water Monitoring and Mitigation Plan submitted to the EPA on 28 April 2017. Following the submission of the reports above it has been agreed with the EPA to undertake further investigations into measures to reasonably reduce potential contaminants of concerns from the potential point sources identified. Boral is currently working with the EPA to revise the documents, as required, in order to address some outstanding comments from the EPA on the original plans.

The close out of the PRP is still progressing in consultation with the EPA.

There were no controlled discharges of waters that occurred during the current reporting period.

4.2.4 Waste Monitoring

Waste monitoring is undertaken in accordance with the waste monitoring program for the Widemere site (EMM, December 2017), the program is described in Section 4.1.1.



A summary of the volumes of waste accepted at site for previous reporting periods is summarised in Table 11. The table references the waste limits described in Condition L4 of EPL 11815.



Build something great™

Relevant condition	Waste Type	Limit	2020 data	2019 data	2018 data
L4.1	Garden waste	1,000 tonnes stockpiled onsite at any one time.	No garden waste is accepted on site. Any garden waste received is rejected and detailed in the rejected loads register	No garden waste is accepted on site. Any garden waste received is rejected and detailed in the rejected loads register	No garden waste is accepted on Any garden waste received is rejected and detailed in the rejection loads register
L4.1	Soils	Arsenic 40mg/kg; Cadmium 2mg/kg; Copper 200mg/kg; Mercury 1.5mg/kg; Zinc 600mg/kg; Petroleum Hydrocarbons C6-C9 150mg/kg; Petroleum Hydrocarbons C10-C36 1600mg/kg; Polycyclic aromatic hydrocarbons 80mg/kg; Polychlorinated biphenyls (individual) 1mg/kg. No Acid Sulfate Soil or Potential Acid Sulfate Soil is to be received at the Premises.	CT1 soil is pre-classified by an Independent geotechnical contractor to confirm compliance with the limits prior to acceptance on-site and copies of classification maintained and stored. No CT1 soils are accepted on site if they are not compliant with limits described.	No soils accepted during this period	No soils accepted during this pe
L4.2	The authorised amount of waste permitted on the premises cannot exceed 750,000 tonnes at any one time	750,000 tonnes of waste at any one time	Maximum amount stored onsite 143,614 tonnes (April 2020)	Maximum amount stored onsite 65,313 tonnes (April 2019)	Maximum amount stored onsite 107,110 tonnes (December 201
L4.3	The Licensee must not receive on the Premises, more than 1,000,000 tonnes of waste per year.	1,000,000 tonnes of waste per year.	597,697 tonnes of material was received during the 2020 reporting period.	641,617 tonnes tonnes of material was received during the 2019 reporting period.	674,470 tonnes tonnes of mater was received during the 2018 reporting period.
L4.4	The height of any stockpile of any material on the Premises, must not exceed twenty (20) metres above ground level.	> 20m AGL	Heights of stockpiles remain 20m below ground level, monitored using height marker on stabilisation plant, 6 monthly flyovers.	Heights of stockpiles remain 20m below ground level, monitored using height marker on stabilisation plant, 6 monthly flyovers.	Heights of stockpiles remain 20r below ground level, monitored u height marker on stabilisation pla 6 monthly flyovers.
L4.5	No asbestos waste is to be accepted or stored at the premises.	0	Any fibruous material detected during three point inspection protocol is rejected and details entered in the rejected load register stored on site.	Any fibruous material detected during three point inspection protocol is rejected and details entered in the rejected load register stored on site.	Any fibruous material detected during three point inspection pro is rejected and details entered in rejected load register stored on

Table 11 – Historical compliance with EPL waste limits for material accepted and stored on site.





4.2.5 Complaints Register

An environmental complaints register is available on site and online, however all hazards or incidents are recorded into Boral's HSEQ Incident Management System reporting system called SEQuence. Once entered, actions can be allocated, investigation teams established, and closure of any incidents tracked to completion.



Complaints Management

The purpose of the complaints register is to:

- Ensure that complaints/concerns received regarding the facility are documented; and
- An appropriate response to complaints is initiated (this may include changing management practices/monitoring procedures or adopting new practices/monitoring procedures).

Complaints must be reported to the Production Supervisor within 24 hours of receipt. The Production Supervisor will log the complaint on the electronic complaints register (SEQuence) and retain a copy on site.

The person reporting the complaint should where possible provide the Manager with the following information:

- Date of the complaint;
- Name of the person making the complaint;
- Telephone number of the person making the complaint;
- Reason for the complaint; and
- Actions taken in response to the complaint.

Upon being informed of a complaint the Manager must determine:

- Whether any further response actions are required; and
- Whether changes to site management procedures/monitoring programs are required.

Complaints Summary & Resolutions

There were no complaints received during the reporting period.

4.2.6 Procedure for the Receival and Screening of Waste for Recycling

The Inspection and Receivals protocol is maintained by Boral and outlines in detail the steps and procedures for the receival and screening of waste for recycling. The procedure includes: Actions and Responsibilities, Screening Procedures, Procedures for handling suspected/confirmed asbestos products, Training, and Document review. This document is reviewed annually and updated as required.

State Government Legislation require recyclers of waste to test their products for a range of substances and materials. The site is complying with this requirement.



4.2.7 Storm Water Management Plan

The main water management issues associated with the activities carried out on site are:

- Sediment from stockpiles and open areas being transported from the site in uncontrolled storm water; and
- pH increase in storm water following percolation through recycled concrete stockpiles.

The site has storm water detention basins with a collective volume of 5.1ML and these are managed as per the sites OEMP.

During November 2016, approval to undertake controlled discharges under EPL 11815 was temporarily removed by the EPA to undertake further investigations into the site's detention water quality prior to discharge. In turn, Boral agreed to the inclusion of the following Pollution Reduction Programs on their EPL which were submitted to the DPE and EPA in April (SWWMP) and May (SWCA) 2017.

- Surface Water Characterisation Assessment (as per EPL 11815 PRP U1.2-U1.4)
- Surface Water Monitoring and Mitigation Plan (as per EPL 11815 PRP U1.5 U1.9).

Due to the removal of the relevant licence condition permitting discharge from the site's stormwater management infrastructure under EPL 11815, no controlled discharges have occurred during the relevant period and there is no water quality data to present at this time.

4.2.8 Landscape Management Plan

The main landscape management issues associated with the site are:

- Removal from the site of all noxious weeds as listed under the NSW Noxious Weeds Act 1993.
- Protection of existing vegetation at the southern end of the site.
- Timely re-establishment of landscaping as areas is completed.
- Ongoing maintenance of landscaped areas.
- Protection of the Swamp Oak Endangered Ecological Community listed under the TSC Act.

Contractors conduct ongoing chemical, mechanical and (where appropriate) biological weed removal controls and bush regeneration on site. Periodic inspections (three monthly) are conducted to identify the early stages of weed infestation.



5. Compliance with conditions of consent

Table 12 below summarises all the conditions of consent, indicates compliance (if relevant) and provides comments if required. Where applicable, the conditions were considered for the reporting period of this Annual Review.



Table 12- Compliance with Conditions of Consent. Boral Recycling Pty Ltd – Construction and Demolition Materials Recycling Facility, Widemere Road, Wetherill Park. DA -SSD 6525

Condition No.	Condition Summary	Complied with Y/N	Comments
1. General		•	
A.1	Increase in processing capacity of an existing resource recovery facility to 1,000,000 tonnes per annum of non- putrescible construction and demolition waste.	Y	The site has processed 674,011 tonnes within the current reporting period.
Obligation to M	inimise Harm to the Environment.	•	·
B.1	Implement all reasonable and feasible measures to minimise harm to the environment that may result from the development.	Y	On-going implementation of water management, dust management, noise management, hydrocarbon management practices.
Terms of Conse	int	•	·
B.2	Carry out development in accordance with the: (a) EIS; (b) RTS; (c) Development layout plans and drawings in the EIS; and (d) The management and mitigation measures.	Y	Operations are carried out generally in accordance with the documents listed.
B.3	If there is any inconsistency between the above documents, the most recent document shall prevail to the extent of the inconsistency. However, the conditions of this consent shall prevail to the extent of any inconsistency.	N/A	No inconsistencies between the documents have been identified to date. The most recent document (SSD 6525) takes precedence in the event of any inconsistency.
B.4	 The applicant shall comply with any reasonable requirement(s) of the secretary from the Department's assessment of: (a) Any reports, plans or correspondence that are submitted in accordance with this consent and; (b) The implementation of any actions or measures contained within these reports, plans or correspondence. 	Y	
Limits of Conse	nt		
B.5	This consent lapses every five years after the date from which it operates, unless the Development has physically commenced on the land to which the consent applies.	N/A	Noted.



Condition No.	Condition Summary	Complied with Y/N	Comments
B.6	The applicant shall not receive or process on the site, more than 1,000,000 tonnes of waste (as expressly permitted by an EPL) per year.	Y	The throughput on site is managed by an online database system called QRS to track volumes of materials entering, leaving and being processed on site.
B.7	The Applicant shall not cause, permit or allow any materials or waste generated outside the site to be received at the site for storage, treatment, processing, reprocessing or disposal on the site, except as expressly permitted by an EPL.	Y	The site undertakes inspections of incoming materials at the site weighbridge entrance, at the tipping point, during processing and is also monitored through CCTV footage to ensure the material is acceptable for receival.
B.8	Virgin Excavated Natural Material (VENM), timber, metal, plastic, glass, paper, cardboard, tree cuttings and tree trunks when mixed with inert waste may only comprise up to 20% by mass of all the stockpiles on site at any one time.	Y	The volumes of each stockpile are continuously monitored by QRS.
B.9	Stockpiles of permitted waste and recycled products shall not be more than 20 meters above ground level.	Y	Utilising stab plant 18.5m as height indicator for lower stockpile & 16m pole at NE corner of site for top stockpiles.
Staged Submiss	sion of Plans or Programs		
B.10	With the approval of the Secretary, the Applicant may: (a) submit any strategy, plan or program required by this consent on a progressive basis; and / or (b) Combine any strategy, plan or program required by this consent.	N/A	Noted.
B.11	If the submission of any strategy, plan or program is to be staged, then the relevant strategy, plan or program shall clearly describe the specific stage to which the strategy, plan or program applies the relationship of the stage to any future stages and the trigger for updating the strategy, plan or program.	N/A	Noted.
Evidence of Cor			
B.12	Where consultation with any public authority is required by the conditions of this consent, the Applicant shall:comply with conditions (a) to (c)	N/A	Noted.
Dispute Resolut		-	
B.13	In event of a dispute between applicant and Council or a public utility in relation to requirements under this consent, either party may refer the matter to the Secretary for resolution.	N/A	Noted. None to Date



Condition No.	Condition Summary	Complied with Y/N	Comments
Statutory Requi	rements		
B.14	The Applicant shall ensure that all licences, permits and approvals/consents are obtained as required by law and maintained as required throughout the life of the Development.	Y	Copies of the sites EPL, DA and other operating permits are maintained in both hard and digital copies in the site office and on internal Boral databases.
Meteorological	Monitoring		
B.15	Within 3 months of the date of this consent, the Applicant shall ensure that there is a suitable meteorological station on the site that complies with the requirements in the latest version of the Approved Methods for Sampling of Air Pollutants in New South Wales. The meteorological station must be operated and maintained for the life of the Development.	Y	Site has an operational weather station installed on site. Results are downloaded monthly.
Utilities and Ser	vices		
B.16	Prior to the construction of any utility works associated with the Development, the Applicant shall obtain relevant approvals from service providers.	N/A	No utility works have been conducted on site in the current reporting period.
Compliance		•	
B.17	The Applicant shall ensure that employees, contractors and sub-contractors are aware of, and comply with, the conditions of this consent relevant to their respective activities.	Y	The site conducts inductions, training, and toolbox talks and provides operational management plans for staff and contractors to comply with the conditions of this consent.
B.18	The Applicant shall be responsible for environmental impacts resulting from the actions of all persons that it invites onto the site, including contractors, sub-contractors and visitors.	Y	The site conducts site inductions for every person (employee, visitor or contractor) prior to entering site.
B.19	The Secretary at any time may require an update on compliance with all, or any part, of the conditions of this consent. Any such update shall meet the requirements of the Secretary and be submitted within such period as the Secretary may agree.	N/A	Noted.
B.20	The Applicant shall meet the requirements of the Secretary in respect of the implementation of any measure necessary to ensure compliance with the conditions of this consent, and	N/A	Noted.



Condition No.	Condition Summary	Complied with Y/N	Comments
	general consistency with the EIS and those documents listed under Condition 82. The Secretary may direct that such a measure be implemented in response to the information contained within any report, plan, correspondence or other document submitted in accordance with the conditions of this consent, within such time as the Secretary may agree.		
	ant and Equipment	r	
B.21	The Applicant shall ensure that all plant and equipment used for the Development is: (a) maintained in a proper and efficient condition; and (b) operated in a proper and efficient manner.	Y	Regular maintenance of all fixed and mobile plant is organised through an automated management system (Maximo) and driver / operator qualifications and verification of competencies are maintained current on the site.
Development Co			
B.22	The Applicant must pay a levy of the percentage authorised by Fairfield City Council Indirect (Section 94A) Development Contributions Plan 2011, of the proposed cost of carrying out the development. The levy must be paid prior to the commencement of the expanded operations. A copy of the receipt for the payment must be submitted to the Department within two months of payment. The amount of the levy that is payable to Council, calculated as at the date of the grant of this development consent is \$1,641.12.	Y	Paid on the 18 January 2017.
	Surrender of Consent	r	
B.23	 Prior to the commencement of the expanded operations, the Applicant shall provide written notification in the manner prescribed by Clause 97 of the Environmental Planning and Assessment Regulations 2000, and surrender the following consent: (a) DA No. 21-1-2002-1 granted by the Minister for Planning on 25 November 2002 for the construction and operation of a construction materials recycling facility. 	N/A	This condition is applicable once the expanded operations commence.
	nent / Waste Monitoring Program:		
C.1	The Applicant shall prepare a Waste Monitoring Program for the Development. This program must:	Y	A waste monitoring program has been devised by external consultants (EMM) and is included in Appendix A of the site's OEMP. The plan fulfils the requirements of the conditions.



Build something great™

Condition No.	Condition Summary	Complied with Y/N	Comments
	 (a) be prepared in consultation with the EPA by a suitably qualified and experienced expert within 3 months of the date of this consent; (b) include suitable provision to monitor the: (i) quantity, type and source of waste received on site; and (ii) quantity, type and quality of the outputs produced on site. (c) ensure that: (i) all waste that are controlled under a tracking system have the appropriate documentation prior to acceptance at the site; and (ii) staff receive adequate training in order to be able to recognise and handle any hazardous or other prohibited waste including asbestos. 		
C.2	The Applicant shall carry out the Development in accordance with the Waste Monitoring Program approved by the Secretary (as revised and approved by the Secretary from time to time), unless otherwise agreed by the Secretary.	Y	The site carries out all operations in accordance with the waste management plan referred to in item C.1.
Construction A	nd Operation Hours	•	
C.3	The Applicant shall comply with the construction and operation hours in Table 1 unless otherwise agreed to in writing by the Secretary. CONSTRUCTION: Monday to Friday; 7 am to 6 pm, Saturday 8 am to 1 pm, Sunday & Public Holidays; Nil. OPERATION: Processing, Receival and Dispatch Activities; Monday to Saturday - 6 am to midnight, Sunday 6 am to 6 pm (one Sunday per calendar month), Public Holidays - Nil. Ancillary Operations; Monday to Saturday - 6 am to midnight, Sunday - 6 am to 6 pm, Public Holidays - Nil.	Y	The site carries out all operations within the consented hours discussed in the consent condition.
C.4	The Applicant must keep a record of Sunday works as identified in Table 1.	Y	The site maintains records on site of any works conducted on Sundays in hard copy on site.
C.5	Condition C.3 does not apply to any activity that is required to be performed by police or other authorities for safety reasons; and/or if there is an on-site emergency that poses an immediate danger to personnel or equipment; and/or the operation or personnel or equipment is endangered. In such	Y	Noted.



Condition No.	Condition Summary	Complied with Y/N	Comments
	circumstances, prior notification shall be provided to the EPA and any affected residents as soon as possible, or within a reasonable period in the case of emergency.		
Operational Noi	se Limits		
C.6	The Applicant shall ensure noise from the operation does not exceed the limits in Table 2 below. (Refer to 'Development Consent')	Y	No operational noise has exceeded the acceptable site criteria and no complaints pertaining to noise issues have been recorded during the reporting period. Implementation of noise mitigation strategies outlined in the site's NMP will help to maintain compliance of the operation.
Noise and Vibra	ation Monitoring		
C.7	The Applicant shall carry out noise and /or vibration monitoring in accordance with any requirements in the EPL. This shall include verification that the facility is operating in accordance with the criteria outlined in Condition C6.	Y	Noise and vibration monitoring is carried out as per the EPL and a noise management plan (NMP) is included in Appendix B of the site's OEMP.
Vibration Criter	ia		
C.8	The Applicant shall ensure that vibration resulting from the development does not exceed the continuous or impulsive vibration criteria in the EPA's Assessing Vibration: A Technical Guideline (February 2006) at residential receivers.	Y	Noted. No excessive vibration has been detected due to site operations to date.
Noise Mitigation	n		
C.9	The Applicant shall: (a) implement best management practice, including all reasonable and feasible noise management and mitigation measures to prevent and minimise operational, low frequency and traffic noise generated by the development; (b) minimise the noise impacts of the development during adverse meteorological conditions; (c) maintain the effectiveness of any noise suppression equipment on plant at all times and ensure defective plant is not used operationally until fully repaired; and (d) regularly assess any noise monitoring data and relocate, modify and/or stop operations to ensure compliance with the relevant conditions of this consent.	Y	 (a) Noise mitigation measures are implemented as per the NMP. (b) Meteorological conditions are monitored using the onsite weather station. (c) Maintenance to plant and machinery is arranged through the automated Maximo system to prevent excessive operational noise emissions. (d) Noise monitoring will be conducted as required as per the NMP.



Condition No.	Condition Summary	Complied with Y/N	Comments
Noise Managem	lent	•	
C.10	As part of the OEMP for the Development, required under Condition D2 of this consent, the Applicant shall prepare a Noise Management Plan. The Plan must: comply with sections (a) to (i) of the condition.	Y	A NMP was prepared and included in the site OEMP, containing the relevant information.
C.11	The Applicant shall carry out the Development in accordance with the Noise Management Plan approved by the Secretary (as revised and approved by the Secretary from time to time), unless otherwise agreed by the Secretary.	Y	The site carries out operations as per the conditions of the NMP.
Odour			
C.12	The Applicant shall ensure the Development does not cause or permit the emission of any offensive odour (as defined in the POEO Act).	Y	The site operations or materials stored and processed on site do not emit offensive odour.
Air Quality			
C.13	The Applicant shall carry out all reasonable and feasible measures to minimise dust generated by the Development.	Y	The site operates a water cart to spray down internal roads and unsealed areas; sprinklers have been set up along all stockpile / operational areas and throughout the processing plant area; vehicle speeds on site are reduced to prevent the suspension of particulates; dust monitoring is conducted on a monthly basis at Point 1 to AM-19 (sampling method) as per EPL M2.2 Point # 1; and unsealed internal roads and operational areas are systematically covered with asphalt or hardstand to reduce the exposed surface area of the site. Back haul road has been concreted to minimise dust generation.
C.14	The Applicant shall carry out air quality monitoring in accordance with any requirements in the EPL.	Y	Dust monitoring is conducted at Point 1 to AM-19 (sampling method) as per EPL M2.2 Point # 1. Dust bottles are collected monthly and sent to BTMS for testing & analysis. Method of sampling is to AS 3580.10.1-2003- Methods for sampling and analysis of ambient air method 10.1- Determination of particulate matter, Deposited matter- Gravimetric method.
C.15	The Applicant shall ensure the development complies with any air quality limits in the EPL.	N/A	No air quality limits were established in the EPL.



Condition No.	Condition Summary	Complied with Y/N	Comments
Air Quality Mitig			
C.16	The Applicant shall: (a) operate the Development so that air emissions are minimised during all meteorological conditions; (b) implement best management practice, including all reasonable and feasible air emissions mitigation measures to minimise emissions from the Development, including but not limited to: (i) limiting vehicle speed on-site to 30 kilometres per hour; (ii) ensuring all loaded vehicles entering or leaving the site have their loads covered; (iii) ensuring all loaded vehicles leaving the site are cleaned of dirt, sand and other materials before they leave the site, to avoid tracking these materials on public roads; and (iv) dust sprays through chemical suppressants, water sprays/misters.	Y	All of the mentioned dust mitigation measures in condition C. 16 are employed on site at all times.
Dust Manageme			
C.17	As part of the OEMP for the Development, required under Condition D2 of this consent, the Applicant shall prepare a Dust Management Plan. The Plan must: comply with conditions (a) to (i).	Y	A dust management plan (DMP) has been devised by EMM and is included in Appendix C of the OEMP and fulfils the requirements outlined in condition C.17.
C.18	The Applicant shall carry out the Development in accordance with the Dust Management Plan approved by the Secretary (as revised and approved by the Secretary from time to time), unless otherwise agreed by the Secretary.	Y	The development is carried out in accordance with the DMP.
Air Quality Audi			
C.19	The Applicant shall carry out an Air Quality Audit of the Development no later than six months after the commencement of the expanded operations.	Y	A "Best Practice Dust Management Benchmarking Study" was conducted by external contractor (Ramboll) and supplied to the DPE on 30 th June 2017.
C.20	Within three months of commissioning this audit, the Applicant shall submit a copy of the audit report to the	Y	2020 Independent audit is due to be submitted in February 2021



Condition No.	Condition Summary	Complied with Y/N	Comments
	Secretary, together with its response to any recommendations contained in the audit report.		
C.21	The Applicant shall comply with any reasonable requirement(s) of the Secretary arising from the Air Quality Audit.	N/A	Noted.
Pollution of Wa	ters		
C.22	The Development shall comply with Section 120 of the POEO Act, which prohibits the pollution of waters, except as expressly provided in an EPL.	Y	Site operations are conducted in accordance with the Surface Water Mitigation and Monitoring Plan (SWMMP), currently under review, and the site's EPL requirements to prevent the pollution of waters.
C.23	Any discharge or water quality criteria specified under the EPL must be complied with.	Y	The site has not undertaken any controlled discharge events during the current reporting period.
C.24	Surface water must only be discharged from the location specified in the EPL.	Y	There has been no controlled discharges during the current reporting period due to EPL 11815 licence condition U1
C.25	Discharges of turbidity and/or suspended solids to waters from discharge point identified in condition EPL is only permitted when the discharge occurs solely as a result of rainfall exceeding a total of 45 mm over any consecutive 5- day period	Y	The only discharges from the site have been the result of rainfall exceeding 120 mm over a 5 consecutive day period.
C.26	The Applicant shall undertake water quality monitoring at the discharge point and in accordance with the monitoring requirements described under this consent and the EPL.	Y	The only discharges from the site have been the result of rainfall exceeding 120 mm over a 5 consecutive day period. During this period of unmanaged overflow, water quality results have not been obtained due to safety concerns.
C.27	All soil and / or vegetation disturbed or removed from the site shall be disposed of to, or stored at, an appropriate location where it cannot be washed off the site.	Y	All sediment / vegetation is stored in a location where it will not run off site
Erosion and Se		1	
C.28	All construction vehicles exiting the site, having had access to unpaved areas, shall depart via a wheel-wash facility.	Y	An operating wheel wash is provided for all vehicles exiting the site from operational areas. Wheel wash facilities have been introduced on the back road leading to the weighbridge to provide extra wash facilities throughout the site.
C.29	The Applicant shall implement erosion and sediment control measures during construction in accordance with Landcom's Managing Urban Stormwater: Soils and Construction guideline.	Y	Erosion and sediment control measures have been implemented on site including vegetation of the site boundaries and adequate surface runoff retention capacities on site. Outlined in the OEMP.



Condition No.	Condition Summary	Complied with Y/N	Comments
Bunding			
C.30	The Applicant shall store all chemicals, fuels and oils used on-site in appropriately bunded storage areas in accordance with the requirements of all relevant Australian Standards and the EPA's Storing and Handling Liquids: Environmental Protection - Participants Manual 2007.	Y	Chemicals are stored in hardstand areas, on bunds with adequate storage capacity to contain leaks. The workshop is now bunded. All machinery servicing is completed in the workshop. A rollover bund has also been installed at the diesel tank.
	nd Surface Water Management		
C.31	Within six months of the expanded operations, the Applicant shall provide certification from a suitably qualified engineer that the internal surfaces of the surface water detention basins have been maintained to the equivalent to, or better than, a clay liner with a permeability of 1 x 1 o-9 ms-1 or less and a thickness of no less than 900 mm and whether any repairs are necessary. The documentation of the certification shall be provided to the EPA and Secretary.	N/A	Not yet applicable. Expanded operations is defined as the point that throughput exceeds 750,000t per annum. This reporting period only reached 674,011t
C.32	Should the certification as per Condition C31 identify that repairs are required; these repairs shall be carried out within two months of the certification.	N/A	Noted.
C.33	The Applicant shall maintain all surface water infrastructure to direct all surface water runoff to the site's surface water detention basins.	Y	Site drainage lines are cleaned regularly and kept free of blockages or obstructions.
C.34	Only water contained in the site's secondary surface water detention basin (sediment basin 2- as identified in Appendix 1) is permitted to be applied to land and stockpiles within the site. Spray from the application of this water must not drift beyond the boundary of the area to which it is applied.	Y	The spray from sediment basin 2 does not extend beyond the site boundary.
C.35	The Applicant shall maintain the surface water detention basins on site with a minimum capacity to contain 45 millilitres of rainfall over any consecutive 5-day period. The capacity requirements of the sediment basins may be modified by the EPL.	Y	The site undertakes daily visual monitoring and recording of the water levels in the detention basins to ensure adequate storage capacity is maintained. The dams have a collective volume of 5.1ML and possesses a HDPE liner.
C.36	The Applicant shall ensure that a visible marker is installed in each sediment retention basin in a position that shows the freeboard in the basin that equates to the volume required to	Y	Red and yellow lines now painted on plastic to indicate water level in the new water collection/sediment dams.



Condition No.	Condition Summary	Complied with Y/N	Comments
	contain all rainfall and runoff in the catchment from a 45 mm rainfall event over any consecutive 5 day period or as modified by the EPL.		
C.37	The sediment basin liner shall be monitored every 3 years to ensure a clay liner of permeability of 1 x 1 o-9 ms-1 or less and a thickness of no less than 900 mm is maintained.	Y	The liner has now been changed from clay to HDPE (impermeable plastic). The new impermeable plastic liner is easier to manage and inspect than the clay liner and therefore is deemed an upgrade.
Groundwater		1	
C.38	Within six months of the commencement of the expanded operations. The Applicant shall conduct a Groundwater Monitoring Program.	Y	Not yet applicable. Expanded operations is defined as the point that throughput exceeds 750,000t per annum. This reporting period only reached 674,011t. However, a groundwater monitoring program has been developed
			as part of the site SWMMP, which will be reviewed upon the expanded operations trigger.
C.39	Within three months of the completion of the Groundwater Monitoring Program, the Applicant shall submit a copy of the Groundwater Monitoring Program as identified in Condition C38 to the Secretary and the EPA.	N/A	Noted. The groundwater monitoring program is yet to be completed.
C.40	The Applicant shall comply with any reasonable requirement(s) of the Secretary arising from the Groundwater Monitoring Program.	N/A	Noted.
Surface Water	Aitigation and Monitoring Plan		
C.41	Prior to any controlled discharges permitted under the EPL the Applicant must provide a Surface Water Monitoring and Mitigation Plan.	Y	A SWMMP was compiled by an external consultant and the final document was submitted to the DPE on 30 th April 2017. The Department stated in a letter dated 28 May 2018 that the SWMMP was not approved, based on further baseline monitoring being required. The required number of samples is still outstanding as of January 2021 due to limited rainfall events that provided sampling opportunities. Ongoing discussions with the EPA are occurring concerning the revision of the SWMMP.
C.42	The Applicant shall carry out the Development in accordance with the Surface Water Mitigation and Monitoring Plan (including the implementation of mitigation measures) approved by the Secretary (as revised and approved by the	N/A	The site SWMMP is not yet approved. Monitoring is occurring where possible.



Condition No.	o. Condition Summary		Comments
	Secretary from time to time), unless otherwise agreed by the Secretary.		
Water Quality V			
C.43	Within three months of implementing the Surface Water Mitigation and Monitoring Plan, the Applicant shall provide a Surface Water Validation Report.	N/A	The surface water validation report is currently awaiting data from a significant rainfall event prior to finalisation.
C.44	Any alterations to the surface water management system identified in the Surface Water Validation Report must be implemented prior to any further controlled discharges to the satisfaction of the Secretary.	N/A	Noted.
C.45	The Applicant must comply with any amended water quality criteria and discharge limits identified in the EPL.	N/A	There have been no controlled discharges during the current reporting period.
Surface Water	Audit		
C.46	The Applicant shall carry out an independent Surface Water Audit of the Development, in consultation with the EPA, following completion of the Surface Water Validation Report or as directed by the Secretary.	N/A	Noted. Not yet triggered.
C.47	Within three months of commissioning this audit, the Applicant shall submit a copy of the audit report to the Secretary, together with its response to any recommendations contained in the audit report.	N/A	Noted. Not yet triggered.
C.48	The Applicant shall comply with any reasonable requirement(s) of the Secretary arising from the Surface Water Audit.		Noted. Not yet triggered.
Contamination			
C.49	Prior to the commencement of construction of the realigned haul road as identified in Appendix 1, the Applicant shall prepare an unexpected finds protocol to ensure that potentially contaminated material is appropriately managed. Any material identified as contaminated shall be disposed offsite, with the disposal location and results of testing submitted to the Secretary, prior to its removal from the site.	Y	Construction works were completed in the 2019 reporting period



Condition No.	Condition Summary	Complied with Y/N	Comments
C.50	The Applicant shall implement the unexpected finds protocol developed under Condition C49 for the duration of construction works.	N/A	Noted.
Parking	-	_	
C.51	The Applicant shall maintain provision for 37 car parking spaces on the site. The spaces must conform to the relevant specifications in the latest version of Australian Standard 2890.1.	Y	The site provides 37 car spaces of acceptable dimensions.
C.52	Accessible, visitor and service vehicle parking spaces must be clearly signposted and designated in accordance with the relevant Australian Standards.	Y	Adequate signage is displayed for visitor and service vehicle parking spaces.
Operating Cond	itions		
C.53	The Applicant shall ensure that: (a) the Development does not result in any vehicles parking or queuing on the public road network; (b) the realigned haul road (as identified in Appendix 1) is constructed and maintained in accordance with the relevant Australian Standards; (c) all vehicles are wholly contained on site before being required to stop; (d) all loading and unloading of heavy vehicles is carried out on-site, in particular, all materials when first received at the site shall be unloaded at the receivals area in the north of the site as identified in Appendix 1; (e) the proposed turning areas in the car park are kept clear of any obstacles, including parked cars, at all times; (f) all heavy vehicles associated with the Development have their loads covered and do not track dirt onto public roads; (g) all vehicles enter and leave the site in a forward direction; and (h) all vehicles exiting the site that have accessed unpaved areas shall depart via a wheel wash facility.	Y	 (a) Adequate parking is provided on site, therefore no cars are parked outside; (b) All internal roads and haul roads are maintained to acceptable standards; (c) The driveway to the site has sufficient room to accommodate several vehicles to avoid stopping before being wholly within the site; (d) Driver inductions and signage stress the requirement for unloading to take place only in the receivals area; (e) A clear turning circle for vehicles in the car park is maintained at all times; (f) Driver inductions and toolbox talks identify the requirement to have loads covered at all times except when loading and unloading; (g) The site traffic management plan and site signage promote the entrance and exit to site in a forward direction only; and (h) An operational wheel wash is available for all vehicles exiting site from operational areas.



Condition No.	Condition Summary	Complied with Y/N	Comments
C.54	The Applicant shall implement a Driver Code of Conduct for heavy vehicle drivers associated with the Development.		Not yet applicable. Expanded operations is defined as the point that throughput exceeds 750,000t per annum. This reporting period only reached 674,011t. The site does have a Driver Code of Conduct issued to all drivers. A copy is within the recently submitted OEMP.
Heritage			
C.55	The Applicant shall cease all works on site in the event that any Aboriginal cultural object(s) or human remains are uncovered onsite. The NSW Police, the Aboriginal Community and the OEH are to be notified. Works shall not resume in the designated area until consent in writing from the NSW Police and/or the OEH has been obtained.	N/A	Noted. No heritage items have been identified to date.
Lighting		-	
C.56	All external lighting associated with the Development shall be mounted, screened, and directed in such a manner so as not to create a nuisance to the surrounding environment, properties and roadways. The lighting shall be the minimum level of illumination necessary and shall comply with Australian Standard AS4282 1997- Control of the Obtrusive Effects of Outdoor Lighting.	Y	All lighting is installed and maintained in accordance with the consent and does not generate nuisance glare.
Signage			
C.57	The Applicant shall not install any advertising signs on site without the written consent of the Secretary.	Y	No advertising signs are displayed on the site.
Flora and Fauna			
C.58	The Applicant shall: (a) avoid clearing the Swamp Oak Floodplain Forest EEC (with the exception of the 12 juvenile Swamp Oaks identified in the EIS) at the southern end of the site and ensure this stand is protected and maintained during construction and operation of the Development;	Y	 (a) No mature Swamp Oaks have been removed from the site; (b) Regular weed control is conducted by an external contractor; and (c) Landscaping along the site boundaries are regularly managed by external landscaping contractors.



Condition No.	Condition Summary	Complied with Y/N	Comments
	 (b) implement suitable measures to manage and prevent the spread of notifiable weeds on site as defined in the Noxious Weeds Act 1993; and (c) ensure landscaping along the eastern boundary of the site is maintained throughout the life of the Development. 		
Security		L	
C.59	The Applicant shall: (a) install and maintain a perimeter fence and security gates on the site; and (b) ensure that the security gates on site are locked whenever the site is unattended.	Y	The site is surrounded by a perimeter fence which is inspected on a monthly basis for signs of damage or disrepair and security gates are locked when the site is non-operational as dictated by site operating procedures and inductions.
Hazards and Ris	sk	•	
C.60	The quantities of dangerous goods stored and handled at the site shall be below the threshold quantities listed in the Department of Planning's Hazardous and Offensive Development Application Guidelines - Applying SEPP 33 at all times.		Quantities of hazardous chemicals stored on site don't flag the threshold quantities for the application of SEPP 33.
Construction Er	nvironmental Management Plan		·
D.1	The Applicant shall implement a Construction Environmental Management Plan during construction work for the Development.	N/A	No construction works have taken place on site during this reporting period.
Operational Env	vironmental Management Plan		·
D.2	The Applicant shall implement an Operational Environmental Management Plan for the Development b) Be submitted to and approved by the Secretary prior to the commencement of expanded operations		An OEMP for expanded operations was compiled by an external consultant and submitted to the DPE in December 2017. Aspects of this were approved by the Department on 28 May 2018.
Management Pla	an Requirements		
D.3	The Applicant shall ensure that the environmental management plans required under this consent are prepared in accordance with any relevant guidelines	Y	The OEMP for the site contains all the relevant information contained in condition D.3.
D.4	The Secretary may waive some of the requirements in Condition D3 if they are unnecessary or unwarranted for particular management plans.	N/A	Noted.
Incident Report	ing		



Condition No.	Condition Summary	Complied with Y/N	Comments
D.5	The Applicant shall notify, at the earliest opportunity, the Secretary and any other relevant agencies of any incident that has caused, or threatens to cause, material harm to the environment. For any other incident associated with the Development, the Applicant shall notify the Secretary and any other relevant agencies as soon as practicable after the Applicant becomes aware of the incident. Within 7 days of the date of the incident, the Applicant shall provide the Secretary and any relevant agencies with a detailed report on the incident, and such further reports as may be requested.	N/A	The site has not experienced any incidents that have resulted or threatened to result in material harm to the environment during the reporting period.
Regular Reporti	ing		
D.6	The Applicant shall provide regular reporting on the environmental performance of the Development on its website, in accordance with the reporting arrangements in any plans or programs approved under the conditions of this consent.	Υ	Environmental reporting of monitoring results and updated Pollution Incident Response Management Plans are updated on the Boral website on a regular basis.
Independent En	vironmental Audit		
D.7	Within 1 year of the date of this consent, and every 3 years thereafter, unless the Secretary directs otherwise, the Applicant shall commission and pay the full cost of an Independent Environmental Audit of the Development.	Y	Molino Stewart was engaged in October 2020 to undertake an independent audit. This auditor was approved by the Secretary on 27 October 2020.
D.8	Within three months of commissioning this audit, or as otherwise agreed by the Secretary, the Applicant shall submit a copy of the audit report to the Secretary, together with its response to any recommendations contained in the audit report.	Y	Noted.
Annual Review			
D.9	Within one year of the date of this consent, and every year thereafter, the Applicant shall review the environmental performance of the Development to the satisfaction of the Secretary. This review must:	Y	This annual review satisfies the requirements of condition D.9.



Condition No.	Condition Summary	Complied with Y/N	Comments
	 (a) describe the Development that was carried out in the previous calendar year, and the Development that is proposed to be carried out over the next year; (b) include a comprehensive review of the monitoring results and complaints records of the Development over the previous calendar year, which includes a comparison of these results against the: NSW Government & Department of Planning and Environment (i) the relevant statutory requirements, limits or performance measures/criteria; (ii) requirements of any plan or program required under this consent; (iii) the monitoring results of previous years; and (iv) the relevant predictions in the EIS; (c) identify any non-compliance over the last year, and describe what actions were (or are being) taken to ensure compliance; (d) identify any trends in the monitoring data over the life of the Development; (e) identify any discrepancies between the predicted and actual impacts of the Development, and analyse the potential cause of any significant discrepancies; and (f) describe what measures will be implemented over the next year to improve the environmental performance of the Development. 		
	tegies, Plans and Programs		
D.10	 Within three months of the submission of an: (a) annual review under Condition D9 above; (b) incident report under Condition D5 above; (c) audit under Condition D7 above; or (d) any modification to this consent, the Applicant shall review, and if necessary revise, the strategies, plans, and programs required under this consent to the satisfaction of the Secretary. 	N/A	A revision & update of the OEMP will be initiated during the next reporting period to address the findings of the independent audit & this annual review. The Surface Water Management Plans for the development are currently undergoing a revision in consultation with the NSW EPA.



Condition No.	Condition Summary	Complied with Y/N	Comments
D.11	The Applicant shall ensure that the operation of the Development is undertaken in accordance with all relevant updated and/or amended strategies, management plans and programs approved by the Secretary (or as revised and approved by the Secretary), unless otherwise agreed by the Secretary.	Y	The site's Environmental Permit Planner, toolbox talks, site inductions and internal audits ensure that the site operations are compliant with the management plans referred to in condition D.11.
Access to Inform	nation		
D.12	The Applicant shall: (a) make copies of the following publicly available on its website: (i) the documents referred to in Condition D2; (ii) all current statutory approvals for the Development; (iii) all approved strategies, plans and programs required under the conditions of this consent; (iv) a comprehensive summary of the monitoring results of the Development, reported in accordance with the specifications in any conditions of this consent, or any approved plans and programs; (v) a complaints register, updated on a monthly basis; (vi) minutes of any community meetings held by the Applicant; (vii) the annual reviews of the Development; (viii) any independent environmental audit of the Development, and the Applicant's response to the recommendations in any audit; (ix) any other matter required by the Secretary; and (b) keep this information up to date and to the satisfaction of the Secretary.	Y	Access to information for this development can be found at the website below: <u>https://www.boral.com.au/our-commitment/environmental-reporting</u> <u>https://www.boral.com.au/locations/boral-recycling-widemere- wetherill-park</u>



6. Comparison of impacts and performance against EIS predictions

A summary of the impacts and performance of the Widemere site against the EIS predictions is presented in Table 13 below.

Impact	EIS Prediction	Performance November 2019 - November 2020
Air Quality	Cumulative annual average within the site of 4 g/m²/month.	The mean result for the annual average of Ash at site 2 from November 2019 to November 2020 is 3.19 g/m ² /mth. The mean result for the rolling average of Ash at site 3 from November 2019 to November 2020 is 3.50 g/m ² /mth. In comparison with the previous reporting figures, this indicates a decrease at dust levels measured at sites 2 and 3 such that levels are now below the cumulative annual average predicted in the EIS of 4g/m ² /mth.
Noise	See Table 1 of the EIS report.	Noise monitoring was undertaken in June 2020. Results are outlined in Table 10 in Section 3.2.1. Noise monitoring indicates compliance with the values predicted in the EIS
Water Quality	Stormwater Discharge Quality TSS <50mg/L pH 6.5-8.5 Oil and Grease <5mg/L	There were no controlled discharges from the site during the current reporting period. However, there were two unmanaged overflow events when the 5-day rainfall event volume exceeded 120mm.
Traffic and Transport	Based on 750,000 tpa and 343 days operation. *Light Vehicle 2-way total: 40 *Trucks 2-way total: 451	Light vehicle movements average 38 movements per day. Truck movements average 316.8 movements per day. A truck movement tracking register has been implemented.
Flora and Fauna	No runoff flowing into southern stand of Swamp She- oak Forest.	All onsite water is diverted into the stormwater detention basins to the SW of the site.
Visual Impact	Visibility of the site is limited, stockpiles may be up to 20m high. The existing vegetation along southern boundary provides an effective visual screen	Transit-way vegetation, natural growth in Prospect Creek and trees within Boral land screens the operation. Earth bund is erected along the SE boundary.

Table 13 - Comparison of impacts and performance against EIS predictions



Impact	EIS Prediction	Performance November 2019 - November 2020
		Changes to the cycle-way and opening of Reconciliation Road will make areas visible. Planting screening trees is ongoing.
Resource Consumption	Water Supply: Anticipated that stormwater reuse will provide the site water demand for wet and medium years. *During drought years, anticipated off-site water requirements to be only 500m ³ or 14 days site water usage.	The primary water use on site for dust suppression comes from the surface water detention pits and 10 x 30 kL recycled water storage tanks on site. Town water is used on occasion.
Waste Management	Impurities from crushing process taken to recycling centres where possible.	Domestic garbage, plastics etc. to landfill. Less than 0.5% taken to landfill. Reinforcing materials (metals) and paper are recycled.
Potential Hazards	Above ground diesel storage tank to be bunded to AS1940-1993 requirements.	Bund can contain >110% of volume. Further, a roof over the tank & bund has since been installed; a rollover bund was installed around the fill point; and the workshop is now bunded.
Social and Economic	Benefits community, consistent with NSW Government aims to reduce amount of C&D waste going into landfill.	Yes. A large volume of C&D waste received, processed and recycled over the last 12 months, diverting waste away from landfill.

BORAL

7. Details when performance goals not achieved

For this reporting period, all comparisons between impacts and performance goals against predictions made in the EIS were compliant.

8. Monitoring data trends

The monitoring data trends available for the life of the project are those for gravimetric dust deposition at monitoring Site 2 and water quality results for discharge from the sediment basin at EPL point 2 prior to the 2017 period when EPL 11815 was revised to insert a cessation of discharge condition (condition U1). The water quality results are presented in the pollution of monitoring data uploaded to the Boral website and are reproduced below for reference (refer to Table 14).

Figure 12 provides a graphical representation of Site 2 gravimetric dust monitoring results for the life of the project. It is evident that the monitoring results were elevated during the 1st year (2003) of operation and monthly spikes are not uncommon during the summer months. Higher levels during summer are not unusual for any operation considering the potential offsite impacts.

Figure 12 also illustrates that the trends, for all parameters measured, have decreased over the life of the project. The Ash trend line is shown on the graph. This decrease is a result of improvements to the facility's processing, handling and dust management over

BORAL

Build something great[™]

	Lab samples - Site 1 (EPL ID # 2)					
Water Discharge	рН	Turbidity	0 & G	TSS	KL discharged	5 day Prior Rainfall
-	рΗ	NTU	mg/L	mg/L	KL	mm
Date Sampled	6.5 - 8.5	50	10	150.0	100	>45
2/04/2015	7.9	6.4	1.4	6.4	94.0	59.4
4/04/2015	8.1	6.5	1.5	6.4	6	81.9
21/04/2015	7.8	90.0	1.7	88.0	93	119.7
22/04/2015	8.1	34.0	2.2	63.0	97	207.1
23/04/2015	8.2	42.0	2.9	67.0	93	250.3
24/04/2015	8.1	29.0	3	55.0	86	245.6
19/06/2015	7.9	25.0	1.5	17.0	52	56.9
5/01/2016	7.2	20.0	0.8	33.0	95	74.7
6/01/2016	7.5	45.0	0.6	82.0	99	134.5
7/01/2016	7.5	40.0	0.7	101.0	98	153.5
8/01/2016	7.5	23.0	1.1	32.0	93	153.5
9/01/2016	7.5	24.0	0.8	47.0	90	110.8
18/01/2016	7.7	35.0	1.3	54.0	35	42.5
31/01/2016	7.2	13.0	0.8	12.0	100	66.3
1/02/2016	7.3	17.0	0.5	15.0	813	66.3
2/02/2016	7.3	14.0	0.4	6.4	100	66.6
3/02/2016	7.4	27.0	0.9	10.0	100	64.4
6/06/2016	7.7	20.0	0.8	21.0	97	256.6
7/06/2016	7.0	27.0	1	24.0	99	255.2
8/06/2016	6.9	7.1	0.7	11.0	99	255.2
9/06/2016	7.1	5.7	0.7	14.0	99	245.2

Table 14 – Historical water quality results obtained from EPL discharge point 2



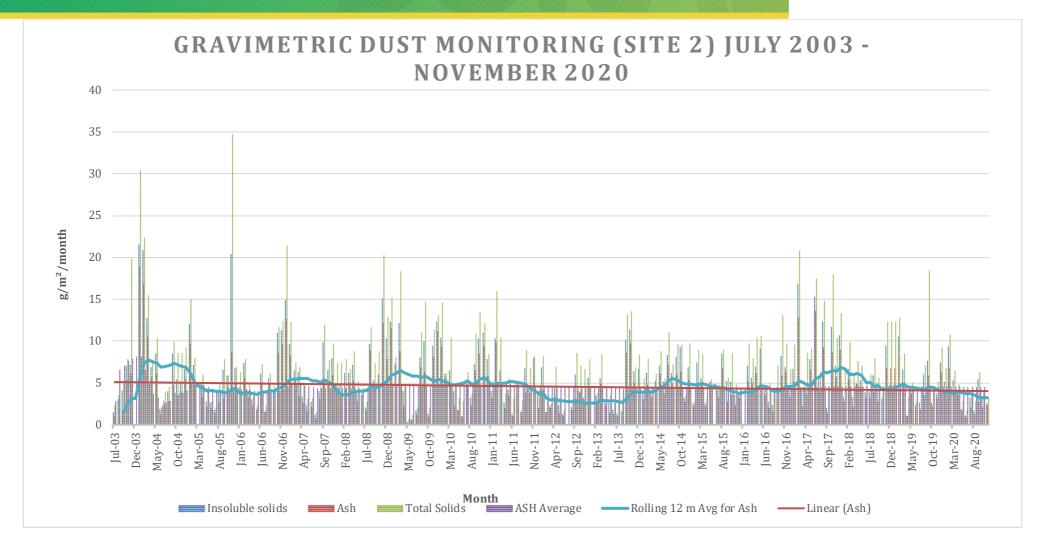


Figure 12 - Gravimetric dust monitoring (Site 2) July 2003 - November 2020



9. Environmental management targets and strategies for the following 12 months

9.1 Independent Environment Audit

The Independent Environmental Audit report for the Widemere Recycling Facility was submitted to the Department on the 25th February 2021. As such, the next reporting period will address the progression of the recommendations and actions that have arisen out of the audit report.

9.2 Water Management

Due to the potential processing capacity of 1,000,000 tonnes per annum of nonputrescible construction and demolition waste (note that this volume has not been triggered on site as of the current reporting period), the site is constantly implementing measures to manage or reduce the volumes of surface water runoff from operational areas.

As the truck wash and upgrade of the dams have been completed, the next steps for water management improvements on site are to upgrade the top wheel wash, add additional sprinklers and install spray bars at the weighbridge to improve dust minimisation in these areas.