


Sarking

TECHNICAL DATA SHEET

HD Paperless

Roof Installation - Up to R1.0 may be added to insulation system when Boral Sarking is installed.

- ✓ Satisfies BCA specifications and requirements for Reflective Foil Laminates
- ✓ Complies with the specifications and requirements of AS/NZS 4200.1 for 'Pliable Building Membranes' which is a manual recognised by the BCA Part 3.5 Roof and Cladding
- ✓ Low Flammability Index in accordance with AS 1530.2
- ✓ Satisfies BCA Part 3.7.1 Fire Hazard Properties
- ✓ Satisfies Health and Safety Regulations

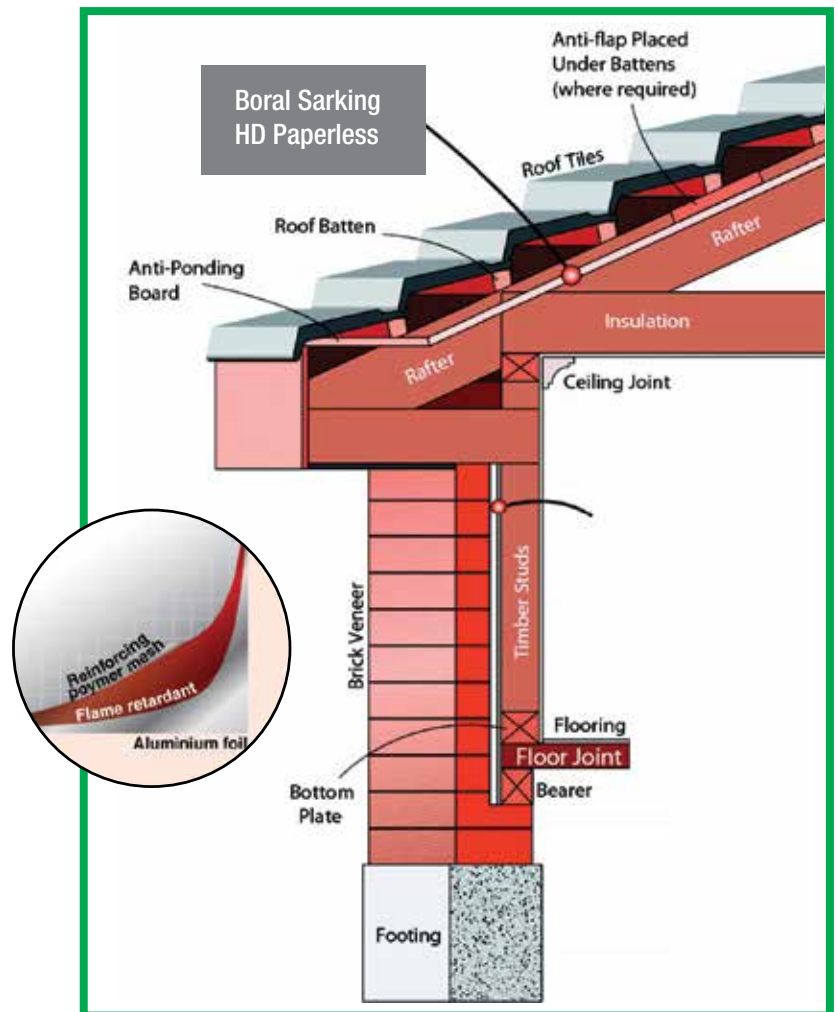

Specification Notes

Roofing material shall be Boral Sarking - HD Paperless (Please specify a colour) _____
Sarking shall be Boral Sarking Extra Heavy Duty

Product Specification

| Boral Sarking - HD Paperless | | |
|---|------------|-----------------------|
| Recommended Applications and Properties | | |
| Residential Roof Insulation | | ✓ |
| Duty | | Heavy |
| Vapour Barrier | | High |
| Emittance | | Reflective |
| Water Barrier | | High |
| Flammability Index <5 | | <5 |
| Tensile Strength Machine Direction (kN/M) | | Min 12.5 |
| Tensile Strength Lateral Direction (kN/M) | | Min 7.5 |
| Edge Tear Resistance Machine Direction (N) | | Min 80 |
| Edge Tear Resistance Lateral Direction (N) | | Min 80 |
| Water Vapour Transmission Rate (Ng/Ns) | | Max 2 |
| Emittance of Reflective Face | | Max 0.05 |
| R. Value - Independently Tested and Endorsed | | |
| Winter | | R1 (1.04) |
| Summer | | R1.5 (1.45) |
| Availability | | |
| Width 1500mm | Length 30m | Area 45m ² |

Product Usage

In all applications:

- External cladding should be installed ASAP
- No contact is to be made with wet concrete or mortar
- Store in dry area
- Shrinkage of up to 2% can be expected

In reflective foil laminate applications:

- Use only in accordance with AS/NZS 4200.2 for the 'Installation Requirements for Pliable Building Membranes'
- Minimum of 20mm air space is recommended adjacent to reflective foil face to achieve maximum insulation values
- 40mm sag between trusses is recommended when using Boral Sarking – HD Paperless
- For use in enclosed structures

Additional Resources;
Boral Roofing Technical Design Manual boral.com.au/rooftiles

For more information about Boral's Roofing products call **1300 134 002** or visit **boral.com.au/rooftiles**

Important Information: Product information contained in this leaflet is correct at the time of printing however is subject to change without notice. Some photos featured in this brochure are artist's impressions of how Boral roof tiles will look on a roof. Some images are computer generated. Please ensure you view a tile display before making a final decision. Colours shown are indicative only and should not be used for final selection. Colours are subject to change without notice. Check print date prior to product selection. Roof tile colours may vary in shades throughout the manufacturing process therefore it is important that roof tiles are blended consistently across the roof. At Boral Roofing, all tiles are manufactured to the requirements of Australian Standard 2049 Roof tiles. Please ask for a copy of the Boral Roofing guarantee before making your purchase. During transportation and installation small blemishes such as scuffing and chip marks may occur. These are not considered a production fault and will not detract from the performance of the roof tile.
© Copyright Boral Roofing – all rights reserved 2018. Boral, the Boral logo, build something great, are trade marks or registered trade marks of Boral Limited and its subsidiaries. Boral Roofing ABN 34 002 944 694. Correct as at April 2018. BCC15598

